



LOGISTICAL DATA		
	HRS250	HRS400
Weight net / gross	10.9 / 12.5 kg	15.5 / 17.5 kg
Packaging dimensions	420 x 140 x 235 mm	475 x 258 x 160 mm
Article number	4906904000	4906905000
Barcode	4046664015284	4046664015291
20 Container	1560 pcs	1114 pcs
40 Container	1560 pcs	1114 pcs
40 HQ Container	1560 pcs	1114 pcs

- ELECTRIC CABLE HOIST**
- Max load capacity – 125 kg single cable and 250 kg double cable (HRS250)
 - Max load capacity – 200 kg single cable and 400 kg double cable (HRS400)
 - Lifting height – 12 metres single cable and 6 metres double cable
 - Easy to install
 - Supplied with special fixing clamps

SPECIFICATIONS		
	HRS250	HRS400
Dimensions L x W x H	400 x 130 x 180 mm	460 x 160 x 220 mm
Load capacity without return pulley	125 kg	200 kg
Load capacity including return pulley	250 kg	400 kg
Lifting height without return pulley	12 m	12 m
Lifting height including return pulley	6 m	6 m
Motor	230 V~	230 V~
Input	530 W	780 W


EXAMPLES OF USE

Court

House

Workshop


Construction site

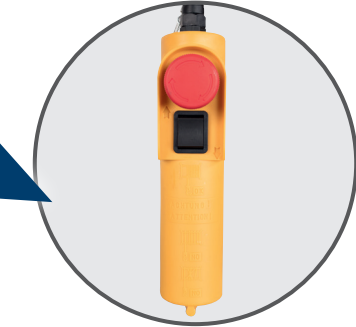

Emergency switch ensures safe work



Limit switch for immediate deactivation in the upper and lower end position

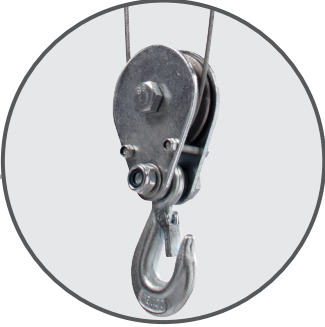

Pulley with load hook



Safety hook The load cannot slip out

PRODUCT DETAILS

Load capacity
125 kg or 250 kg with pulley (HRS250)
200 kg or 400 kg with pulley (HRS400)

Lift height
Lift without pulley: 12 m
Lift with pulley: 6 m

Steel cable diameter
3.00 mm (HRS250)
3.60 mm (HRS400)

Operating cable length
1400 mm