

POWER GENERATOR 2800 W

- 6.5 HP engine pull cable starter
- Powerful and air cooled 4 stroke petrol engine with 196 cm³ displacement
- Max. 2800 W output power, 2500 W rated output
- Two 230 V connections and one 12 V DC connector
- Sturdy and robust steel frame with wheel kit and hinged handles
- Integrated overload protection, voltmeter and low oil warning



OPTIONAL ACCESSORIES

OIL ULTRA PERFORMANCE LONG LIFE SAE 5W-40 500 ml



Article number: 3906100701
Barcode: 4014915073512



Overload protection, voltmeter and low oil warning

SPECIFICATIONS - ENGINE	
Model	Single-cylinder; 4 stroke petrol engine
Max. engine power	6.5 HP
Displacement	196 cc
Starter	Pull starter
Tank capacity	15 L
Fuel consumption 2/3 load	1,39 L/h
Fuel consumption at max. load	3,89 L/h

SPECIFICATIONS - GENERATOR	
Dimensions L x W x H	590 x 445 x 450 mm
Voltage control	AVR-System
Rated output / max. output	2500 / 2800 W
Socket	2 x 230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes
Voltmeter	Yes

LOGISTICAL DATA	
Weight net / gross	43 / 47 kg
Packaging dimensions	605 x 445 x 450 mm
Article number	5906220903
Barcode	4046664095460
20 Container	200 pcs
40 Container	400 pcs
40 HQ Container	450 pcs

 COPPER COIL

- ✓ Long service life
- ✓ Better electric conductivity

 EXAMPLES OF USE

Camping



Garden shed



Event



Construction site



Easy to manoeuvre thanks to transport handles and large wheels



Large tank capacity (15 litres)

Sturdy and robust steel frame

196 cc, 6.5 HP, 4-stroke petrol engine

PRODUCT DETAILS

12 V connection



2 x 230 V power outlet



Lasting



Robust



Powerful



Fuel-saving




Power pack



Transportable



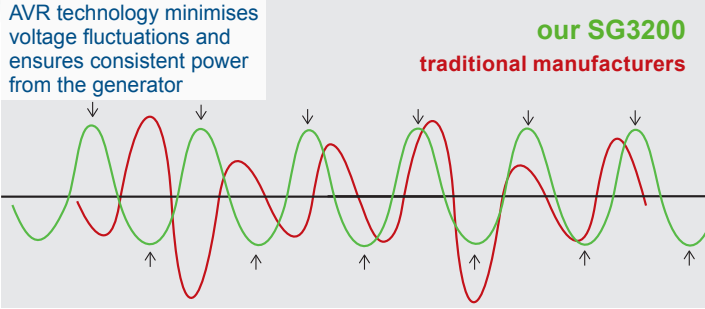

Integrated voltage meter, oil level warning (protects the motor from running dry) and protection against overload (ensures the safety of the device)



2 x 230 Volt power outlets, 1 x 12 Volt connection, max. power of 2800 Wat