Part of the battery platform
20 V IXES
ONE BATTERY FOR ALL DEVICES

SOFT START

PLUS X AWARD
2024 | Achieved for:
High Quality
Design
Ease of Use
Functionality
www.plusxaward.com

CORDLESS HAND-HELD CIRCULAR SAW

- **Powerful cordless hand-held circular saw** for the precise cutting of wood
- **Cordless work with the Scheppach IXES 20 Volt series –** all batteries and chargers belonging to this system series can be combined with the cordless hand-held circular saw
- Suitable for conventional **saw blades with a diameter of 165 mm x 20 mm**
- **Saw blade speed 4300 rpm**
- **The blade guard with retraction lever** ensures increased safety during sawing
- Ergonomic and compact design with **soft-grip surface**
- **Parallel stop** allows particularly precise cuts
- Maximum **cutting depth 53 mm at 90° / 39 mm at 45°**
- On/Off switch with **quick-stop** ensures immediate braking of the saw blade
- Easy saw blade replacement, thanks to **spindle lock**
- **Safety switch** that can be operated from both sides, with **safety lock**
- Cutting depth and cutting angle can be adjusted steplessly
- **Practical laser and LED work light** ensure perfect illumination of the cutting line
- Integrated **soft-start and protection against overload** ensure a long service life
- Low-dust working, thanks to **connection to sawdust extraction**
- Battery and charger available separately
- Includes Ø 165 mm saw blade with 24 teeth, Allen key, parallel stop, connection to external dust extraction, extraction adapter

360°

SPECIFICATIONS

Dimensions L x W x H	295 x 180 x 200 mm
Saw blade diameter	165 mm
Cutting height at 90° max.	53 mm
Cutting height at 45° max.	39 mm
Angular range max.	45°
Number of saw blade teeth	24
Saw blade speed	4300 rpm
Engine type	Brushed motor
Battery voltage	20 V

LOGISTICAL DATA

Weight net / gross	2.5 / 3.0 kg
Packaging dimensions	310 x 218 x 192 mm
Article number	5901815900
Barcode	4046664216834
20 Container	1670 pcs
40 Container	3520 pcs
40 HQ Container	4140 pcs

C-HCS165-X BATTERY

EXAMPLES
SUITABLE FOR

Timber boards | Joist timber | Laminate/panelling

Ergonomic handle
with soft-grip surface

Safety switch
can be operated from both sides

Easy saw blade replacement
thanks to spindle lock

Parallel stop ensures precise cuts.

PRODUCT DETAILS

Cutting height at 90°	Cutting height at 45°
53 mm	39 mm
165 / 20 mm saw blade diameter	Speed 4300 rpm
20 V	LED work light & laser

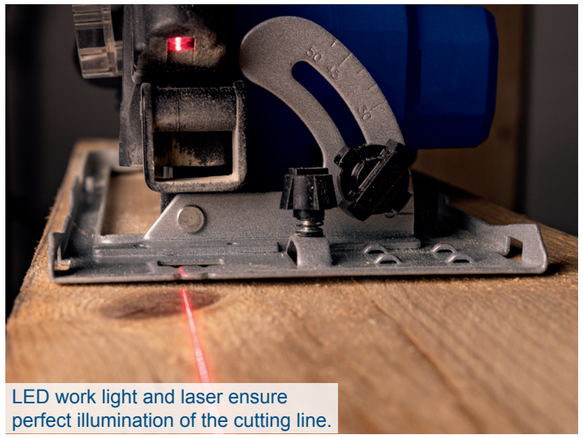
LED work light and laser ensure perfect illumination of the cutting line.