

254 MM CIRCULAR TABLE SAW

- High-performance circular table saw for precise cutting of joists and profiled boards as well as for longitudinal cuts and mitre cuts
- Powerful 2200 W motor with protection against overload
- Ergonomic posture and stable positioning, thanks to the robust base made of sheet steel
- Hand wheel for comfortable and stepless height adjustment
- Integrated connection for an extraction system
- Saw blade is steplessly adjustable from 0 to 45° to ensure precise mitre cuts
- Cutting height at 90° max. 85 mm / at 45° max. 63 mm
- The table width extensions on both sides allow processing of large work pieces
- Mitre gauge can be adjusted from -60° to +60° – ideal for mitre cuts
- Longitudinal stop and integrated scale ensure precise cuts
- Saw blade with a diameter of 254 mm, 24 teeth, 5,300 rpm ensures precise cutting results
- Maximum work safety ensured by saw blade guard
- Includes mitre gauge, longitudinal stop, push stick and saw blade with 24 teeth




SPECIFICATIONS	
Dimensions L x W x H	930 x 935 x 1000 mm
Saw blade dimensions	Ø 254 x Ø 30 x 2.6 mm, 24 Z
Blade speed	5300 rpm
Table size with extension	630 x 935 mm
Table height	880 mm
Cutting depth at 90°	85 mm
Cutting depth at 45°	63 mm
Motor	220 – 240 V~
Input	2200 W

LOGISTICAL DATA	
Weight net / gross	23 / 24.5 kg
Packaging dimensions	670 x 570 x 320 mm
Article number	5901326901
Barcode	4046664223269
20 Container	245 pcs
40 Container	476 pcs
40 HQ Container	544 pcs



EXAMPLES OF USE  
SUITABLE FOR

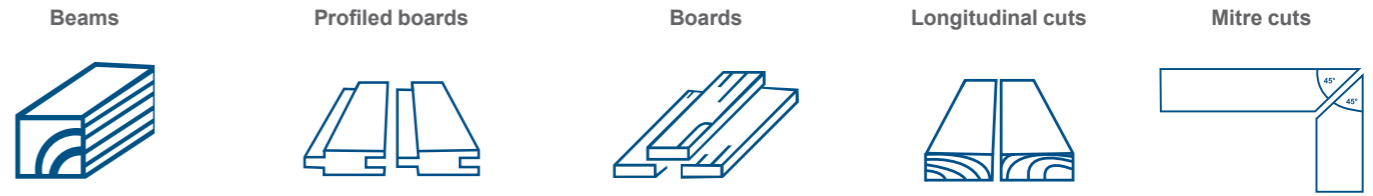

Saw blade can be steplessly adjusted from 0 to 45° to ensure exact mitre cuts.



Thanks to the extra large work table with a continuous scale, bigger work pieces can also be processed precisely.

PRODUCT DETAILS

<p>Cutting height max 90° : 85 mm</p>	<p>Cutting height max. 45° : 63 mm</p>
<p>Table width extension left and right</p>	<p>Saw blade can be adjusted from 0 to 45°</p>
<p>Ergonomic table height 880 mm</p>	<p>Saw blade 254 mm x 30 mm x 2,6 mm</p>
<p>Softstart</p>	<p>Saw blade speed 5,300 rpm</p>



The table width extensions on both sides allow processing of large work pieces.



Mitre gauge can be adjusted from -60° to +60° – ideal for mitre cuts.