



- ✓ Planing
- ✓ Thicknessing

OPTIONAL ACCESSORIES


HS PLANER KNIVES
TWO-PIECE SET

2x

Article number: 7902200611
Barcode: 4046664238652

260 MM PLANER / THICKNESSER

- Combined planer thicknesser for processing planks, joists or boards
- Powerful, maintenance-free 2200 W induction motor
- Planing width 260 mm / thickness capacity 160 mm
- Suitable for softwood and hardwood
- Easy conversion from planer to thicknesser without the need for tools
- Convenient adjustment of the thickness capacity using a hand crank
- Robust aluminium planer fence can be adjusted from 90 to 135° to ensure precise planing
- Planing table 1040 x 280 mm made of sturdy die-cast aluminium
- Planer thicknesser table 400 x 260 mm made of abrasion-resistant grey cast iron
- 2 high-speed steel planer knives, blade speed 6,500 rpm for smooth and precise planing
- Low-dust working, thanks to connection for dust extraction
- Base features transport handles and wheels to ensure sturdy positioning and easy transport

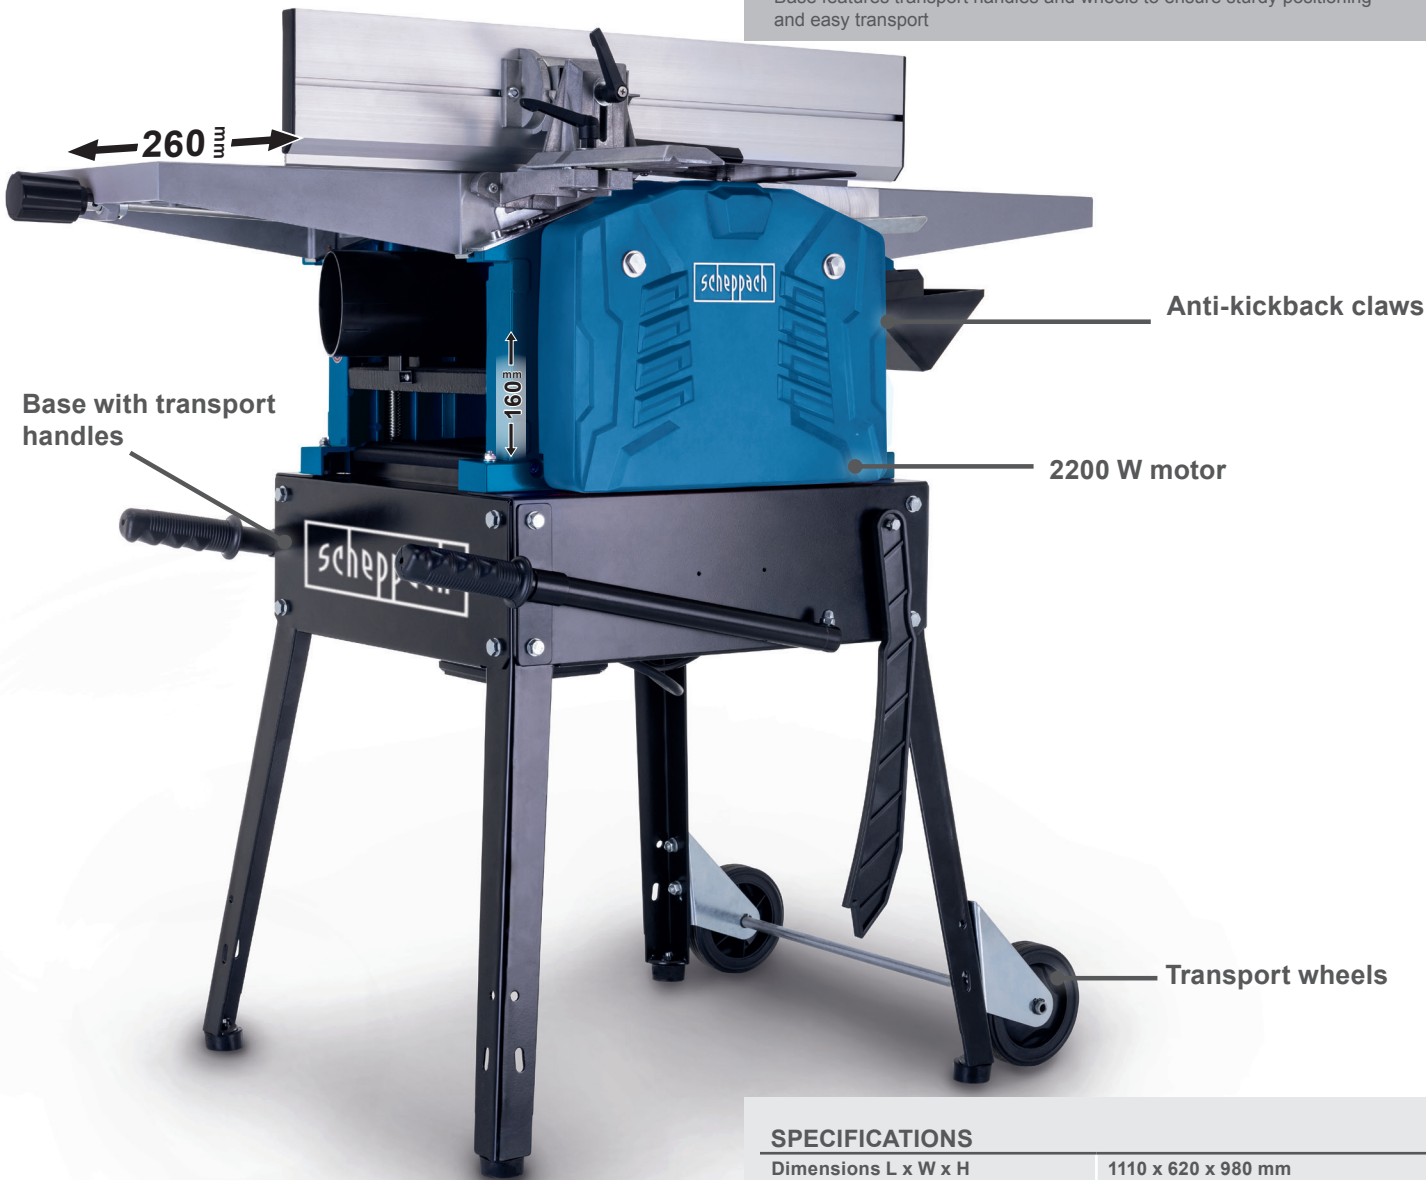

LOGISTICAL DATA

Weight net / gross	71 / 76 kg
Packaging dimensions	640 x 430 x 560 mm
Article number	5902214901
Barcode	4046664217589
20 Container	120 pcs
40 Container	248 pcs
40 HQ Container	256 pcs

SPECIFICATIONS

Dimensions L x W x H	1110 x 620 x 980 mm
Surfacing table size	1040 x 280 mm
Thicknessing table size	400 x 260 mm
Number of blades	2
Planing shaft speed	6500 min ⁻¹

SURFACE PLANING


Plane width max.	260 mm
Stock removal max.	3 mm

THICKNESSING



Thickness capacity / width max.	160 / 260 mm
Stock removal max.	3 mm
Motor	220 – 240 V~ / 50 Hz
Input	2200 W



EXAMPLES OF USE
SUITABLE FOR WORK
WITH SOLID WOOD AND SOFTWOOD

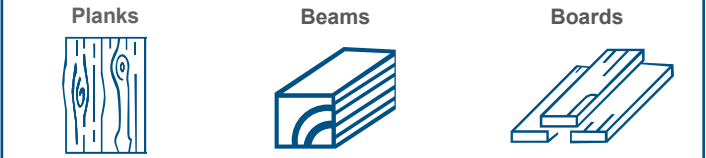

Base with transport handles and wheels to ensure sturdy positioning and easy transport.

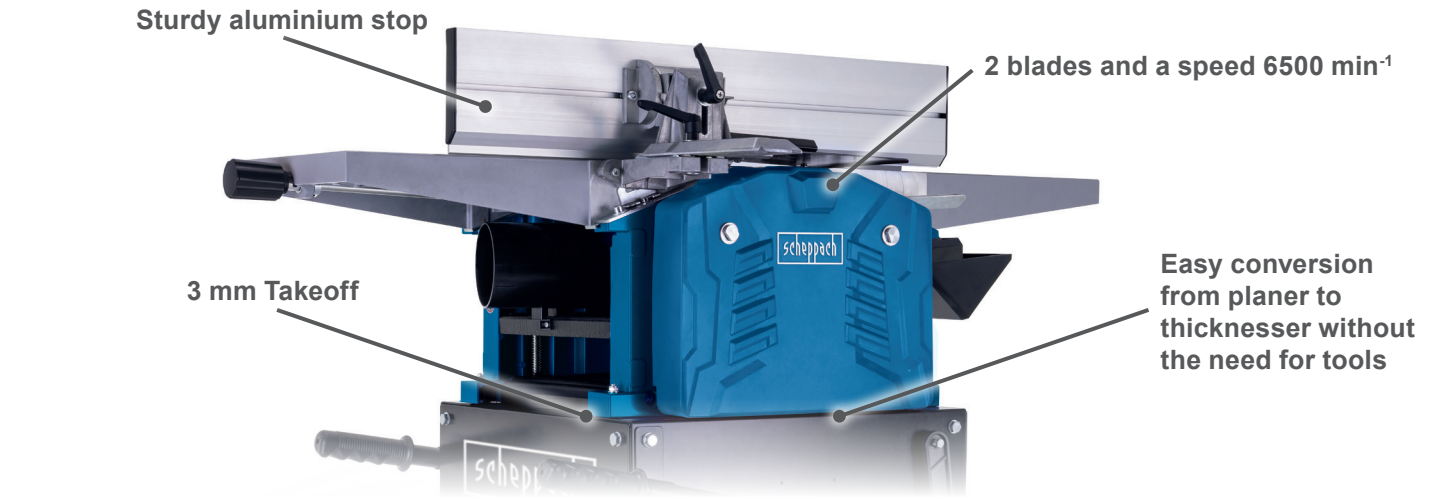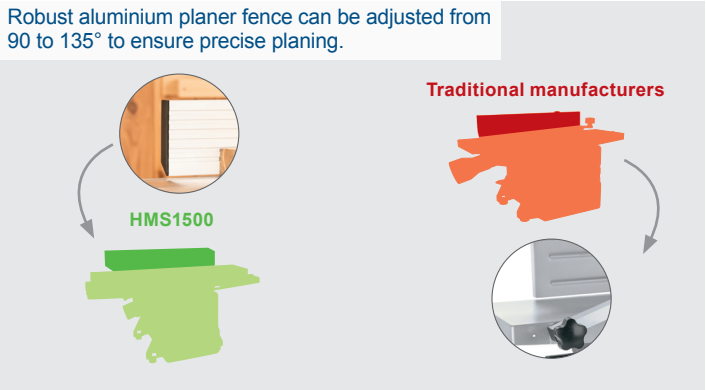

2 high-speed steel planer knives, blade speed 6500 rpm for smooth and precise planing.

PRODUCT DETAILS

Powerful 2200 W motor

Planer fence rotatable 90 - 135°

Robust

Space-saving

Planing table 400 x 260 mm

Planing table dimensions 1040 x 280 mm

Planing width 260 mm

Admission height 160 mm



Convenient adjustment of the thickness capacity using a hand crank.