


25 T METRE LOG SPLITTER

- Splitting force: 25 tonnes
- Splits hardwood or softwood with a length of up to 1100 mm effortlessly and reliably
- The low floor plate makes it easier to collect the logs
- Adjustable splitting stroke
- Large wheels and three-point attachment for mobile use
- The lowerable cylinder saves space when transporting and storing the splitter
- Optimised safety thanks to two-handed operation
- Torsion-resistant, powder-coated steel structure
- Log catching bar
- Log fixing device
- Includes log lifter

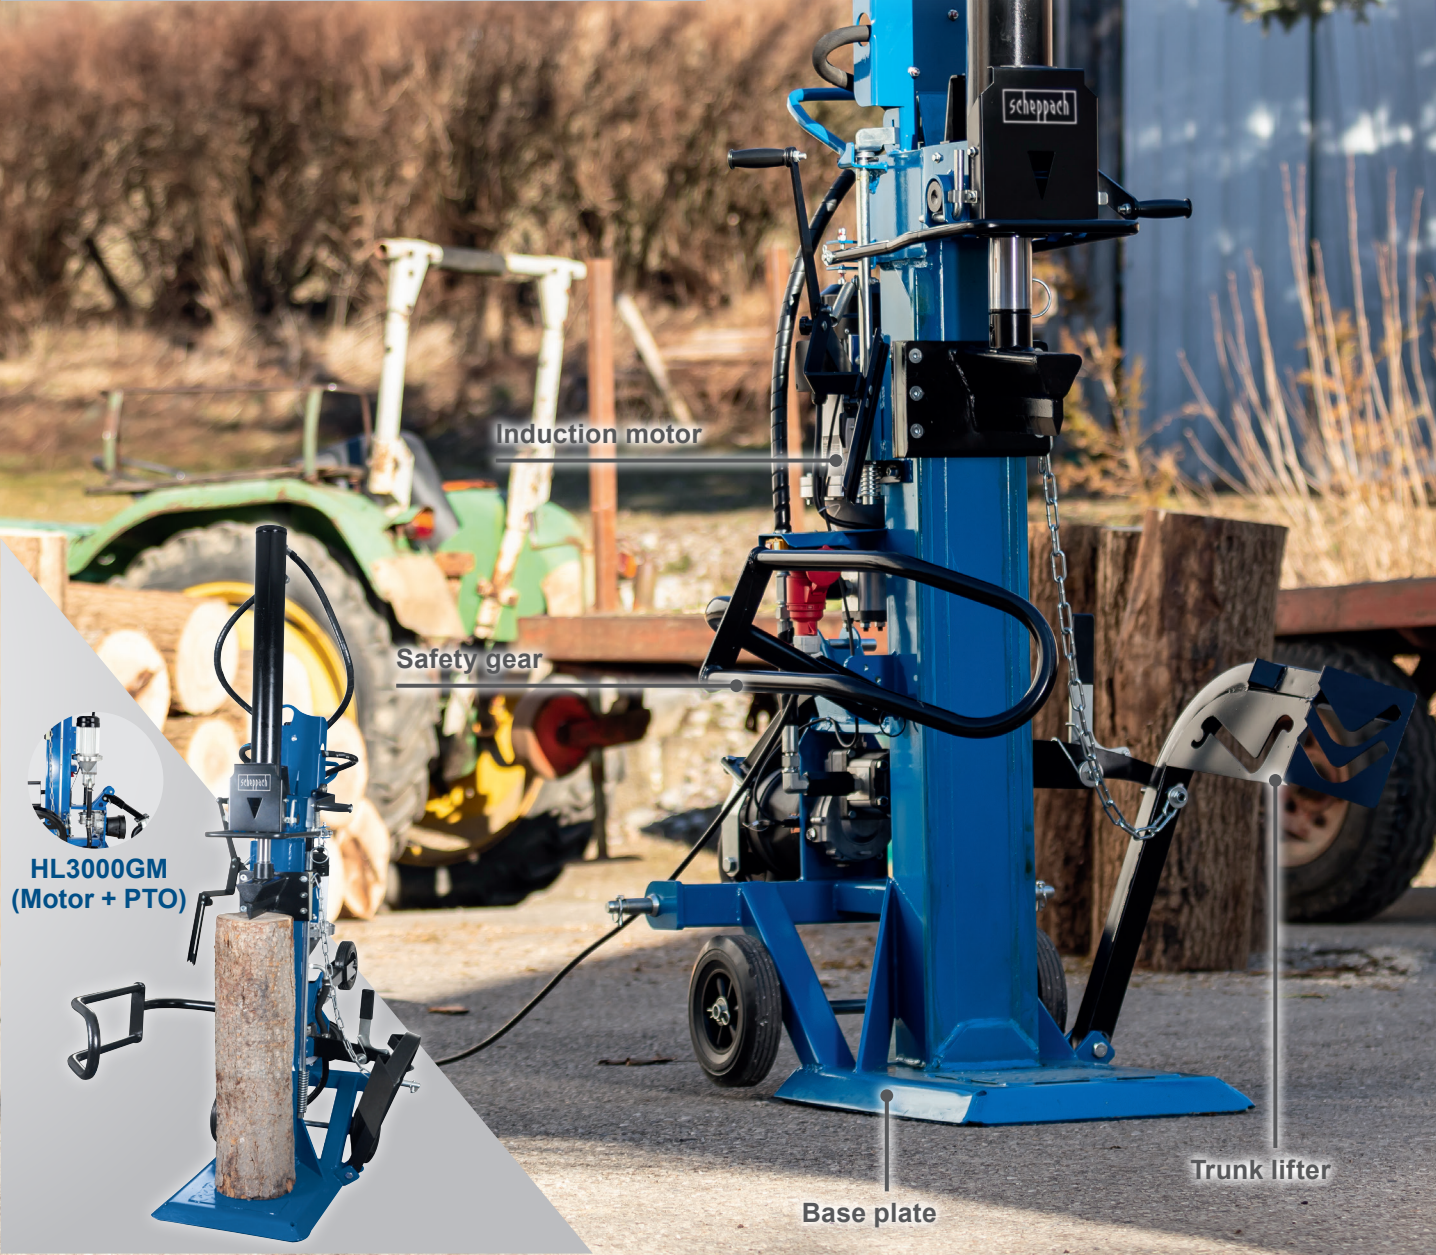

HL3000GM
(Motor + PTO)

Engine power

400 V~ / 50 Hz

5100 W

Induction motor

Safety gear

Base plate


Trunk lifter

SPECIFICATIONS	
Hydraulic pressure max.	22.7 MPa
Cylinder rise	948 mm
Forward speed 1 / 2	Motor: 10.5 / 4.3 cm/s PTO: 13.1 / 5.3 cm/s
Return speed	Motor: 7.5 cm/s PTO: 9.3 cm/s
Motor	400 V + PTO
Engine power	5100 W

LOGISTICAL DATA	
Weight net / gross	319 / 320 kg
Packaging dimensions	940 x 680 x 1900 mm 940 x 680 x 1900 mm (with palette)
Article number	5905509917
Barcode	4046664111856
20 Container	20 pcs
40 Container	42 pcs
40 HQ Container	42 pcs



Using the log fixing device, the log can be secured before the splitting process without having to hold it.

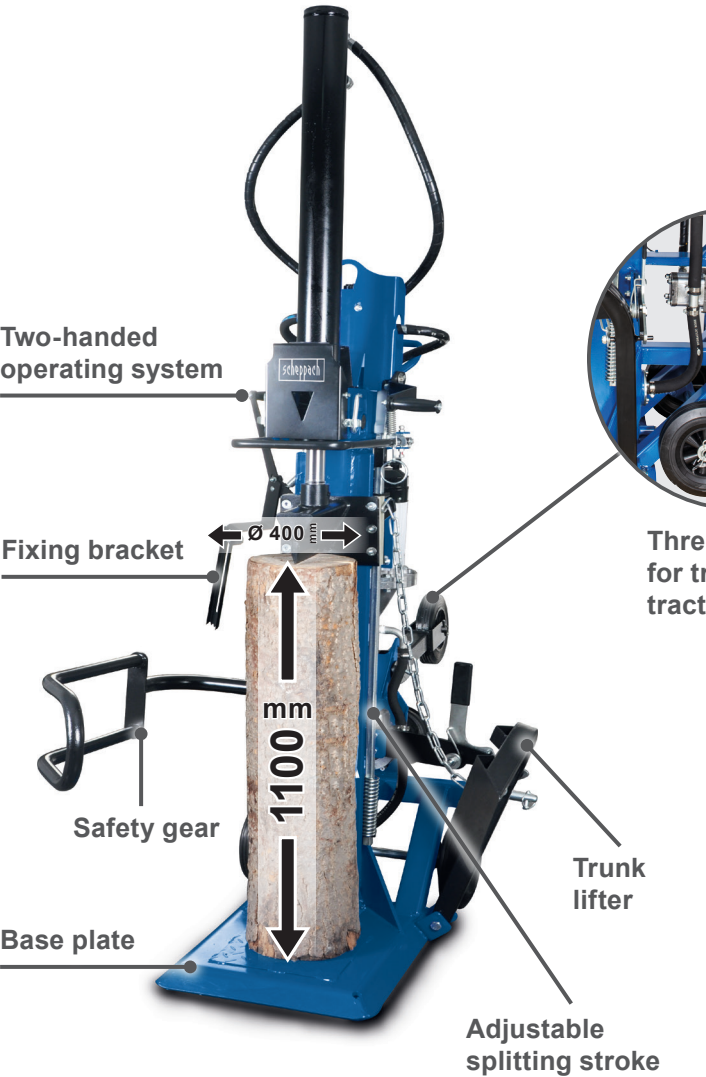

The 2-hand safety operation, the on/off switch and the log catching bars on both sides allow safe and effective working.

PRODUCT DETAILS

Log diameter



80 - 350 mm

Log size



560 - 1100 mm

Powerful splitting



max. 25 t

Engine power



5100 W

Adjustable splitting system



stufenlos

Robust design



2 drive types



Drive shaft



Induction motor

EXAMPLES OF USE



Hardwood



Softwood



The log lifter allows ergonomic and effortless working.