


WALL CHASER

- Ideal for chases in concrete, brickwork, render or plaster
- **Powerful 2250 W motor**, 5400 rpm
- Ø 125 mm diamond cutting wheel
- **Stepless, tool-free cutting depth adjustment** ensures maximum flexibility 0 to maximum 40 mm cutting depth, thanks to dual gears
- Adaptable cutting width adjustment with up to 4 cutting wheels for narrow and wide chases from 8 to 40 mm
- Easy cutting wheel replacement, thanks to spindle lock
- **Soft-start** is gentle on the motor and protection against overload ensures a long service life
- Large working radius, thanks to 4 m cable
- **Electronic feedback circuitry** ensures uniform, reliable power even when subjected to load
- Additional guide wheels on the sides allow precise guidance of the tool
- **Ergonomic and compact design** with soft-grip surface and 2-hand operation
- Connection for external dust extraction
- Includes 4 diamond cutting wheels Ø 125 mm

ELECTRONIC
FEEDBACK
CIRCUITRY



DUAL GEARS WITH
ALUMINIUM DIE-CAST
HOUSING



SPECIFICATIONS

Dimensions L x W x H	465 x 211 x 151 mm
Cutting wheel diameter	125 mm
Speed	5400 rpm
Groove width	8 – 40 mm
Groove depth	0 – 40 mm
Motor	220 – 240 V~ / 50 Hz
Input	2250 W

LOGISTICAL DATA

Weight net / gross	5.5 / 7.2 kg
Packaging dimensions	520 x 288 x 182 mm
Article number	5902602901
Barcode	4046664233558
20 Container	960 pcs
40 Container	2088 pcs
40 HQ Container	2396 pcs

APPLICATION EXAMPLES
OF CHASES IN



Bricks



Cement



Plaster

PRODUCT DETAILS


Overload protection




Soft-start



Groove depth 0 – 40 mm



Groove width 8 – 40 mm



Powerful motor
2250 W



Cutting wheel diameter
125 mm




Ergonomic handling with soft-grip surface.




Additional guide wheels on the sides allow precise guidance of the tool.



Easy cutting wheel replacement, thanks to spindle lock.

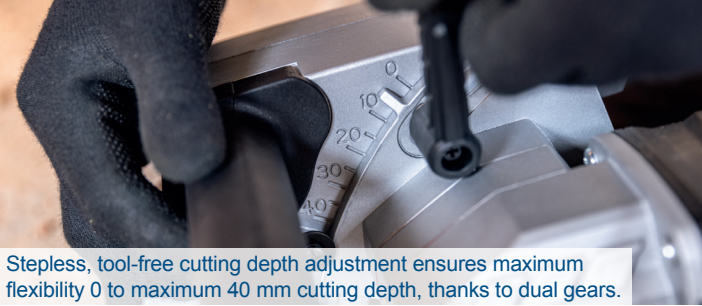

Stepless, tool-free cutting depth adjustment ensures maximum flexibility 0 to maximum 40 mm cutting depth, thanks to dual gears.

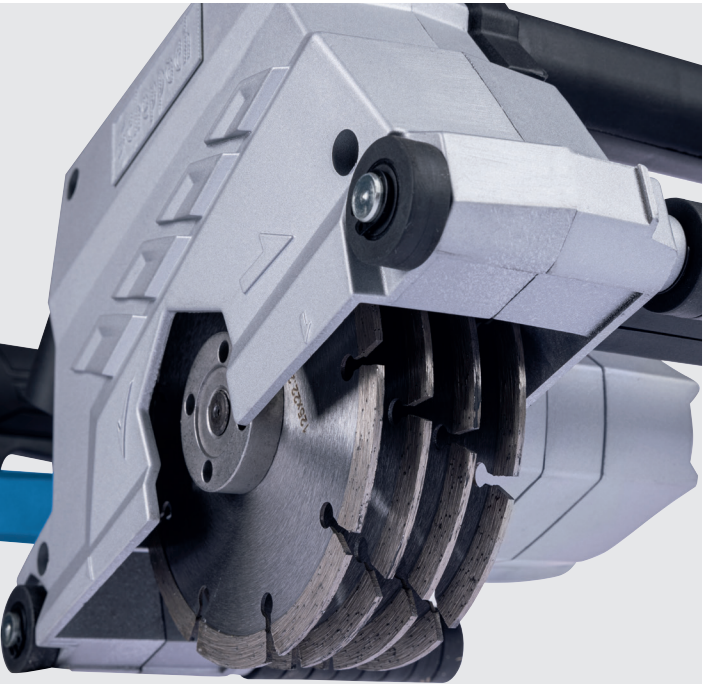

Adaptable cutting width adjustment with up to 4 cutting wheels for narrow and wide chases from 8 to 40 mm.