

3in1

- ✓ Plunge saw
- ✓ Hand held circular saw
- ✓ Panel sizing saw


Scheppach PL55
incl. 2x700mm guide rail
Premium Class 1,5
Heimwerker Praxis
Germany 3/23
Value for money; very good

Best Buy (Set)
Heimwerker Praxis
Germany 3/23

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
FAZIT: TTTTT
Bewertet mit „GUT“
Ausgabe 8/2012
www.selbst.de

6" PROFESSIONAL PLUNGE SAW SET

- High-performance 1200 W motor
- Guide rail allows parallel penetration of the saw blade and uniform guidance of the saw
- Saw blade with 24 teeth guarantees a very clean cross section with minimal breakout for laminate
- Saw blade enclosed by guard ensures efficient extraction of sawdust
- A cutting depth of 55 mm allows cutting and adjustment of most door thicknesses
- Suitable for different materials such as solid wood, work tops, MDF and double coated boards, laminate etc.
- The PL55 delivers the best cutting results – in the workshop or on the construction site
- Perfect shadow gaps of 16 mm
- Includes 2 x 700 mm guide rails, rail connector and tilt protection

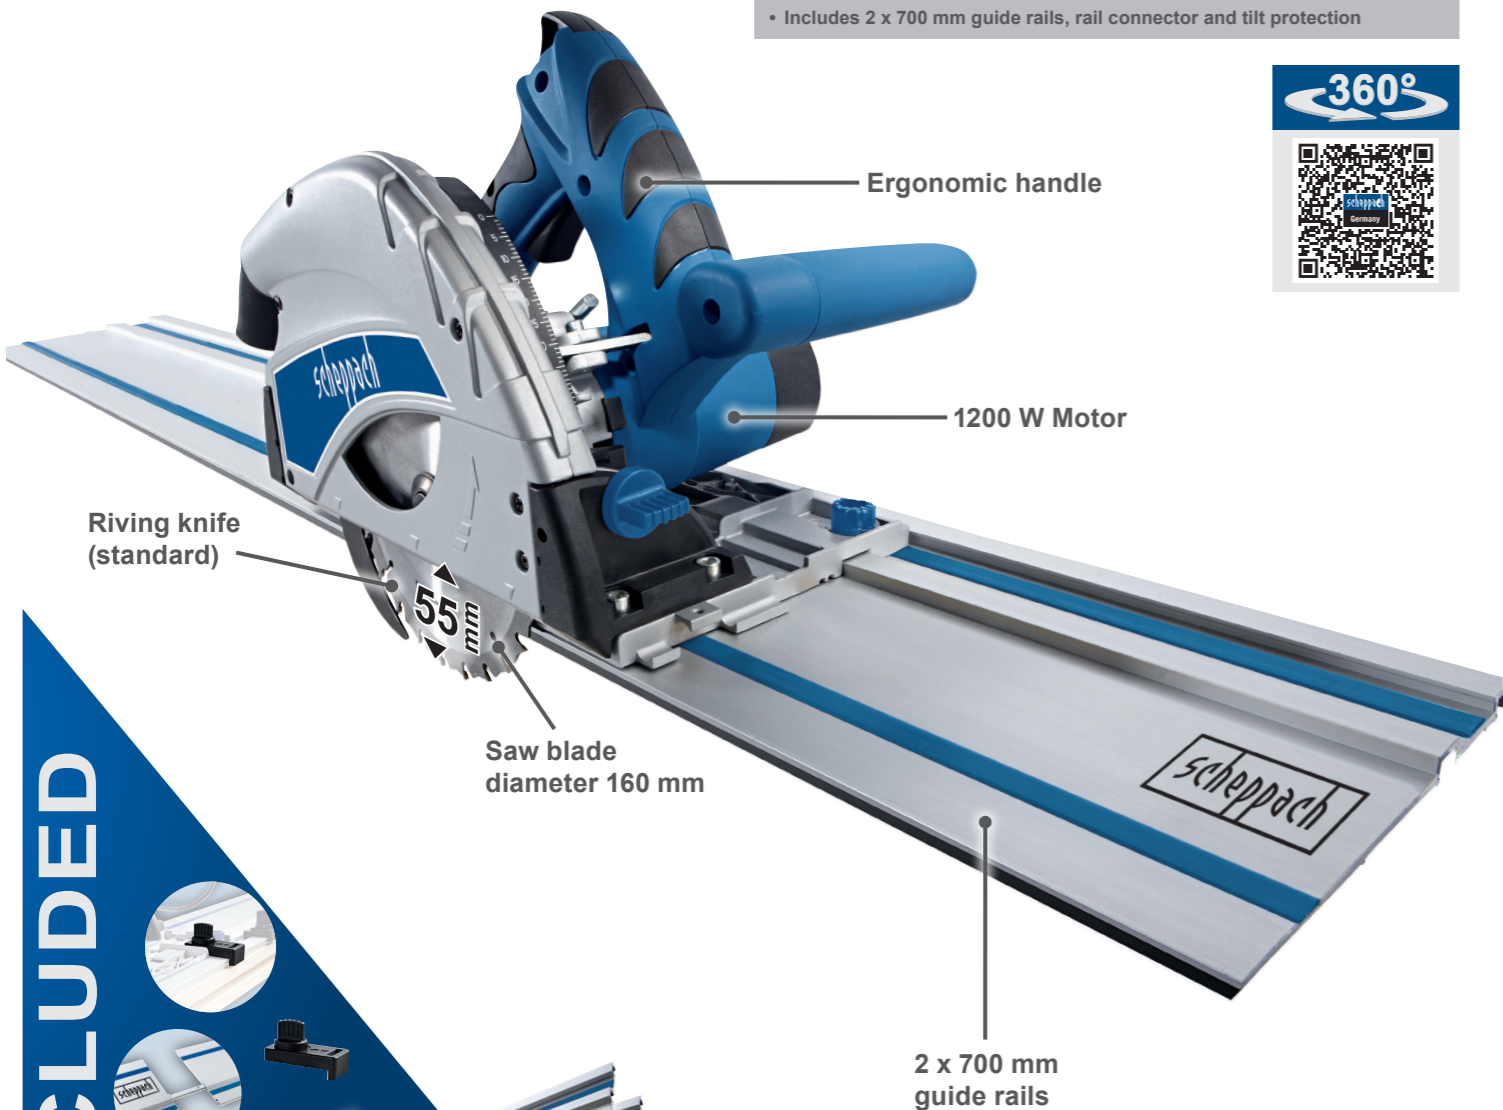

INCLUDED

LOGISTICAL DATA

Weight net / gross	7.4 / 8.2 kg
Packaging dimensions	710 x 260 x 270 mm
Article number	5901802915
Barcode	4046664025665
20 Container	900 pcs
40 Container	1880 pcs
40 HQ Container	2100 pcs

SPECIFICATIONS

Dimensions L x W x H	340 x 260 x 235 mm
Blade Ø	160 mm
Arbor Ø	20 mm
Blade speed	5500 rpm
Max. cut 90°	55 mm
Max. cut 45°	41 mm
Bevel capacity	0 – 45°
Close to wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Motor	230 – 240 V~
Input	1200 W



EXAMPLES OF USE

Wooden boards



Planks



Laminate / panelling



PRODUCT DETAILS

Cutting depth 90°



Cutting depth 45°



Kompact design



Lightweight



Saw blade
160 mm x 20 mm x 2,4 mm



Idle speed 5500 rpm



PL55



Conventional
hand-held circular saws




The advantage compared with conventional hand-held circular saws is the plunge function. Using this function, specific demands that require plunging the saw blade into the material can be implemented without problems.

Shadow gaps up to 16 mm can be created quickly and safely using the PL55, even in veneered wood, thanks to the splinter guard.



Thanks to stepless adjustment, cuts from 0° to 45° are possible. Tilt protection securely keeps the PL55 on the rail at any angle.

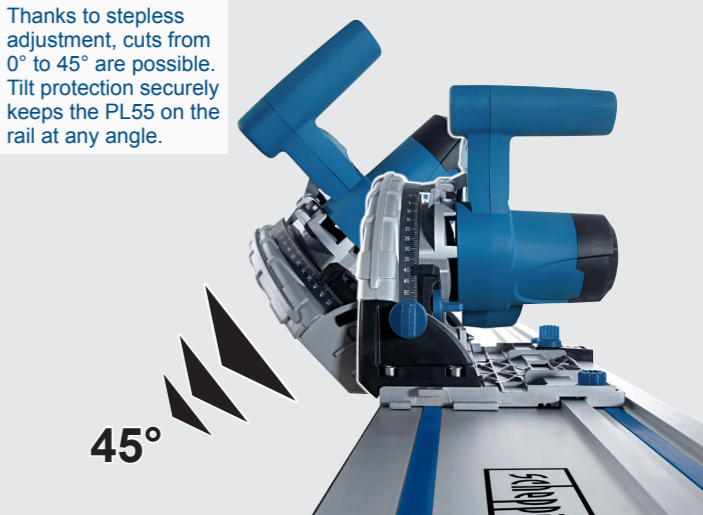

The cutting depth of 55 mm covers a wide range of uses.



This plunge saw is ideal for cut-outs in kitchen work tops and allows precise work without splintering.

