


Sanding disc with velcro fastener



Horizontal and vertical sanding belt

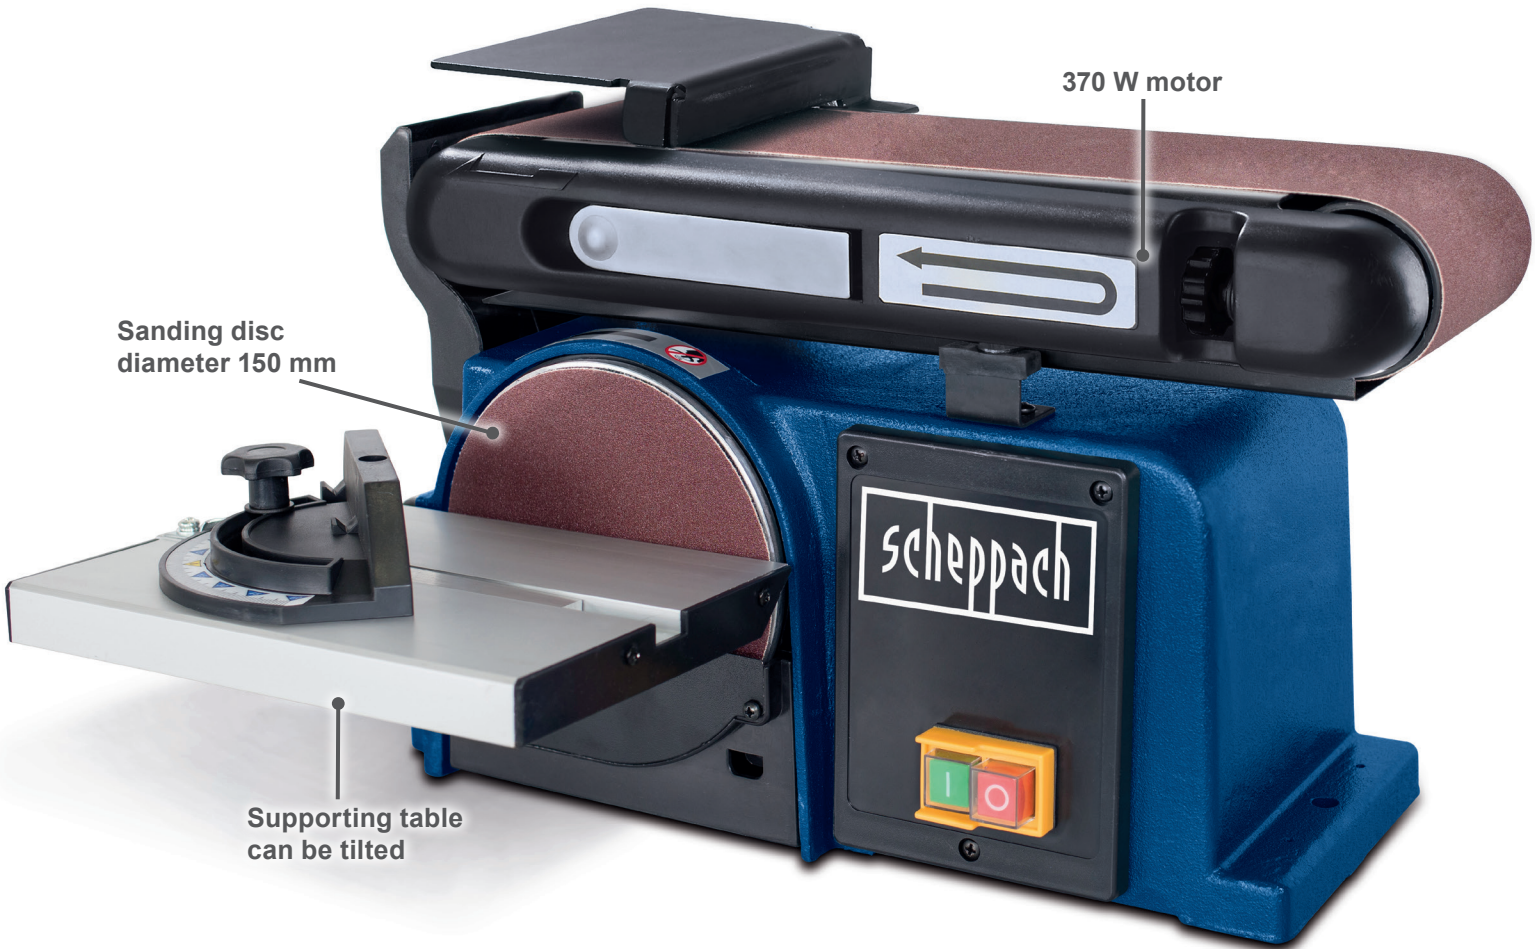

Sanding disc diameter 150 mm

Supporting table can be tilted

370 W motor

SPECIFICATIONS	
Dimensions L x W x H	470 x 365 x 295 mm
Sanding belt length / width	915 / 100 mm
Sanding disc	150 mm
Table adjustment	90° – 45°
Belt speed	450 m/min
Sanding disc speed	2980 rpm
Suction connector diameter	63 mm
Motor	230 – 240 V~ / 50 Hz
Input	370 W

LOGISTICAL DATA	
Weight net / gross	16,85 / 18,25 kg
Packaging dimensions	560 x 315 x 335 mm
Article number	4903302901
Barcode	4014915082095
20 Container	560 pcs
40 Container	1120 pcs
40 HQ Container	1344 pcs



BELT AND DISC SANDER

- 370 W high-performance induction motor for working quietly and with low vibration
- Sanding belt can be adjusted for horizontal and vertical use
- Supporting table can be tilted
- Solid cast material construction allows sufficiently high contact pressure for consistent, precise sanding results
- Sanding disc with Velcro fastener for easy replacement of sanding paper



EXAMPLES OF USE
SUITABLE FOR SOFT WOOD AND HARD WOOD

Curves



Corners



Chamfers



Surfaces




Angle grinding



Thanks to the special design, even large areas can be processed easily and effectively.




The disc sander is integrated in the housing, thus allowing sanding of large work pieces.

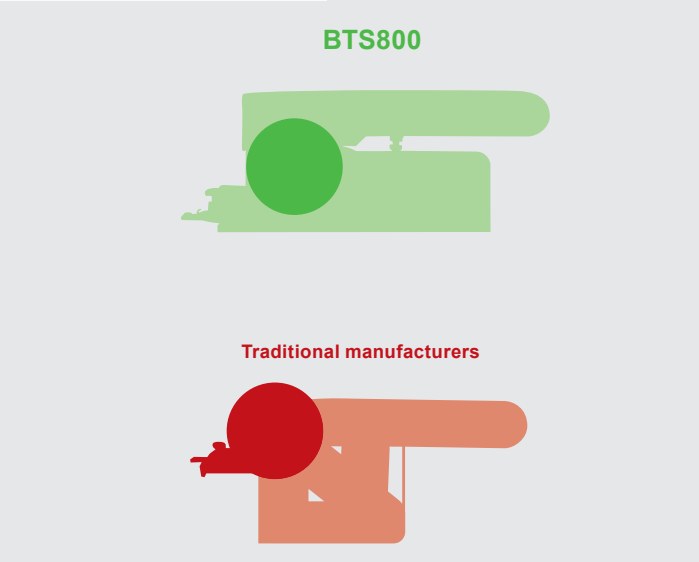

PRODUCT DETAILS


Sanding disc diameter 150 mm



Sanding disc with Velcro



Sanding belt length 915 x 100 mm



Extraction option on the unit of 63 mm



Support table 0° to 45°



Solid cast material construction



Sanding belt can be adjusted for horizontal or vertical use



Compact footprint 470 x 365 x 295 mm



450 m/min belt speed

2980 rpm sanding disc speed

Solid cast material construction allows sufficiently high contact pressure

Option for attaching to workbench