


12" CIRCULAR TABLE SAW


- Powerful 2800 W – 400 V~ (2200 W – 230 V~) induction motor
- Sliding table carriage standard
- Sturdy, powder-coated sheet steel design and galvanised table-top
- Table length extension and table width extension
- Blade guard with suction hose outlet
- Fully adjustable blade height by easy use of handwheel
- Max. 83 mm cutting depth
- 2 long life TCT blades – Ø 315 mm for precise cutting results
- Saw blade guard for enhanced security
- Sturdy fence
- Foldable handles and wheels for easy transport



2 power settings

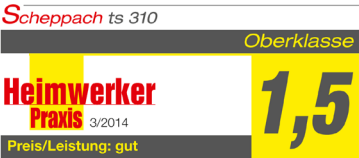

230 V~ / 50 Hz	400 V~ / 50 Hz
2200 W	2800 W

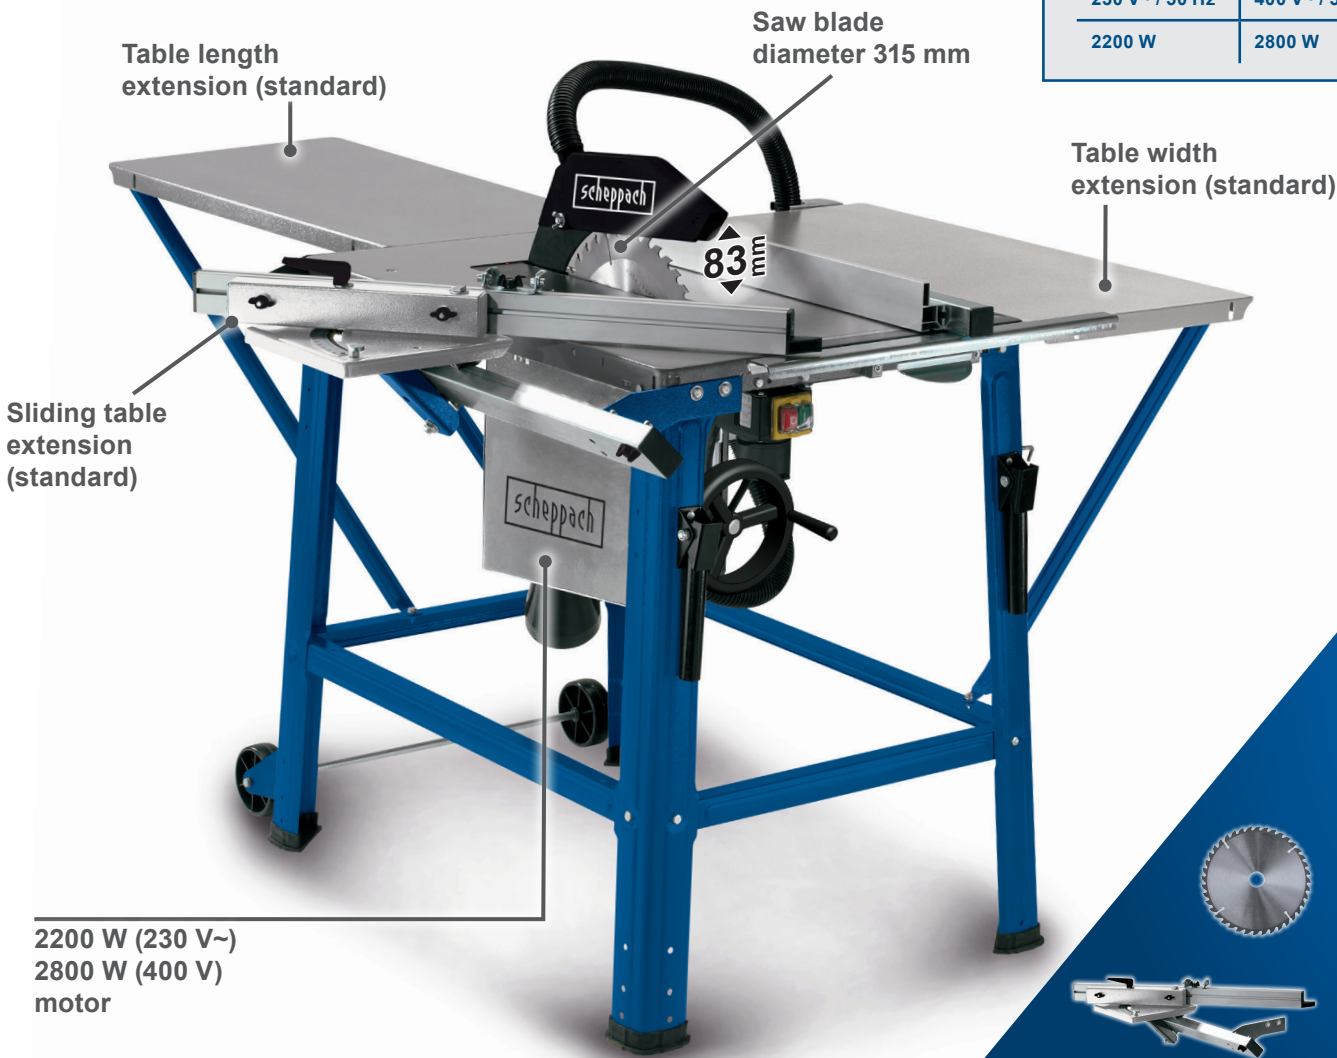


2200 W (230 V~)
2800 W (400 V)
motor

SPECIFICATIONS

Dimensions L x W x H	1750 x 1240 x 1150 mm	
Saw blade dimensions	Ø 315 x Ø 30 x 3 mm, 24T Ø 315 x Ø 30 x 3.2 mm, 48T	
Blade speed	2800 rpm	
Motor speed	2800 rpm	
Table size	800 x 550 mm	
Table height	850 mm	
Cutting depth at max. 90°	83 mm	
Cutting depth at max. 45°	49 mm	
Saw blade adjustable	0 – 45°	
Sliding table guide rail	960 mm	
Motor	230 V~	400 V
Input	2200 W	2800 W

LOGISTICAL DATA

Weight net / gross	55 / 61 kg (230 V~)	58 / 64 kg (400 V)
Packaging dimensions	890 x 610 x 450 mm	
Article number	4901305901 (230 V~)	4901305902 (400 V)
Barcode	4014915082040	4014915082057
20 Container	110 pcs	
40 Container	225 pcs	
40 HQ Container	225 pcs	

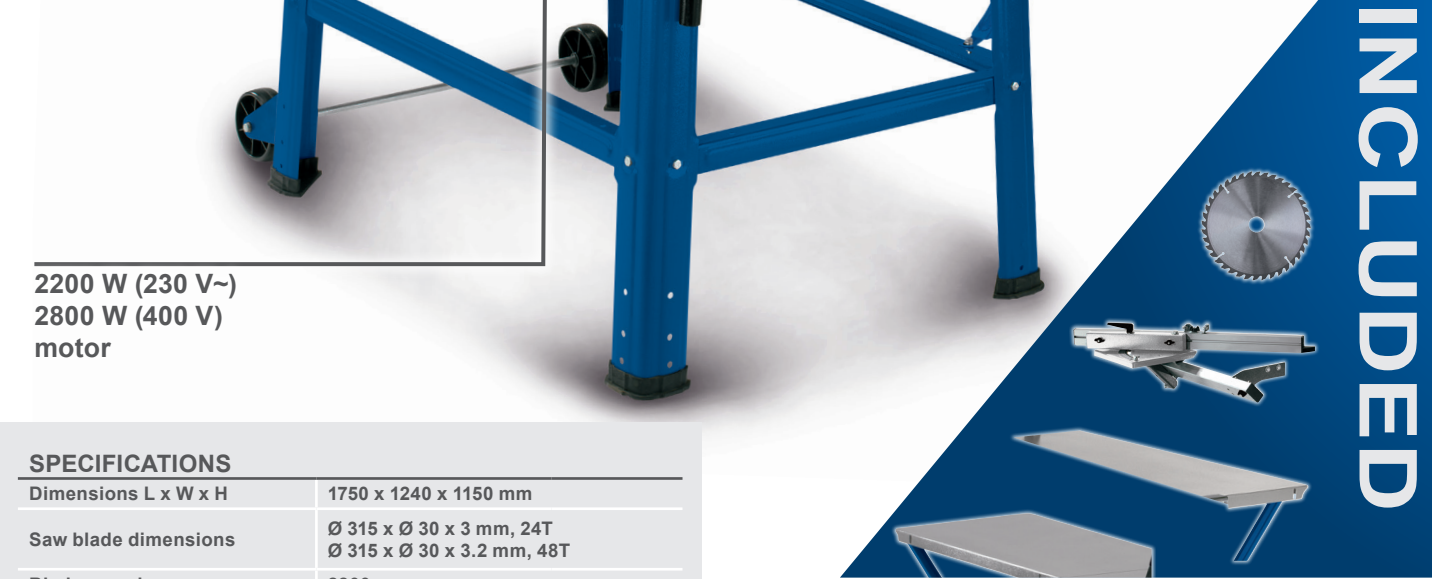

INCLUDED



EXAMPLES OF USE
SUITABLE FOR


Beams



Profiled boards




Boards




Longitudinal cuts



Mitre cuts



The saw table shelving area of the TS310 is approximately 230% bigger than that of other manufacturers.

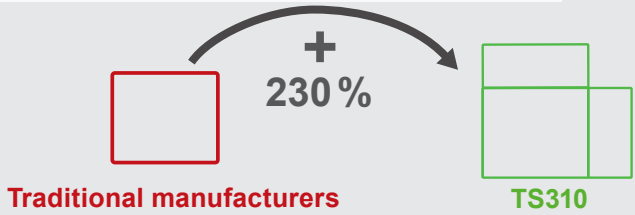

PRODUCT DETAILS

Cutting height
max. 90°: 83 mm



Cutting height
max. 45°: 53 mm




Table length and width
extension (to the right
and to the rear)



Ergonomic table
height 850 mm



Saw blade
315 mm x 30 mm x 3 / 3.2 mm



Swivelling saw blade
0 - 45°





Table length and width extension
ensures additional shelving area



Wheels
easy to manoeuvre



Sliding table
length 960 mm, transverse stop
adjustable from 0-45°

