



BENCH DRILL

- 5 speeds for timber, metal and all conventional plastics
- Drill chuck capacity from 1.5 to 13 mm
- Robust steel construction
- High-performance 500 W motor
- Integrated laser for precise drilling results
- 250 mm max. distance between chuck and frame foot
- 170 mm max. distance between chuck and table
- Stable 190 x 290 mm base plate

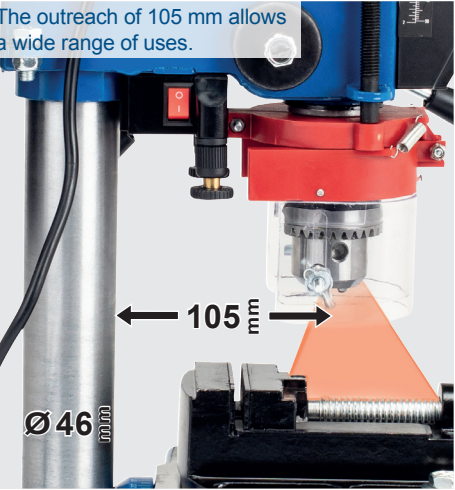

INCLUDED



SPECIFICATIONS

Dimensions L x W x H	435 x 220 x 600 mm
Table size	160 x 160 mm
Table tilt	45° – 0 – 45°
Speed range	600 – 2650 rpm
Chuck capacity	1.5 – 13 mm
Max. chuck to table	170 mm
Max. chuck to base	250 mm
Motor	230 – 240 V~
Engine power	500 W

LOGISTICAL DATA

Weight net / gross	13.5 / 15 kg
Packaging dimensions	460 x 380 x 250 mm
Article number	5906810901
Barcode	4046664068808
20 Container	640 pcs
40 Container	1380 pcs
40 HQ Container	1440 pcs




5 speed selections

Steel construction

Laser

500 W Motor

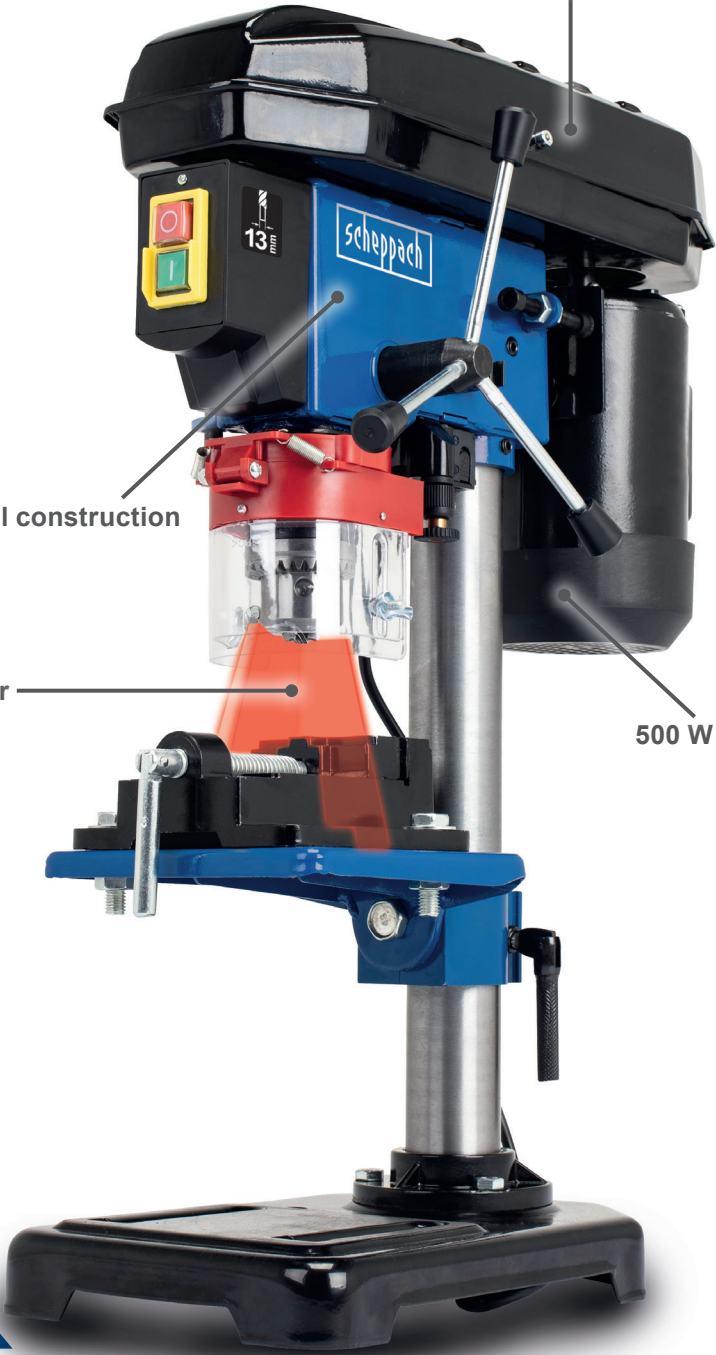

EXAMPLES OF USE
SUITABLE FOR PRECISE DRILLING IN




Wood




Steel




Metal





Aluminium



Plastic



UNIVERSAL AND VERSATILE USE

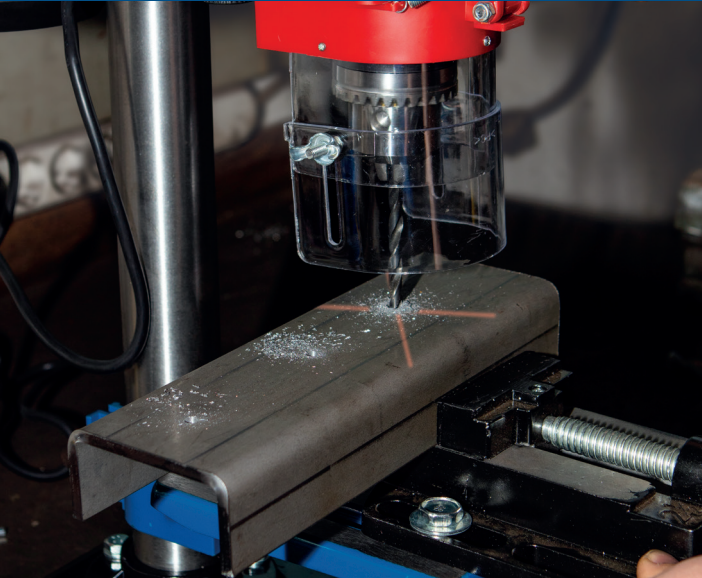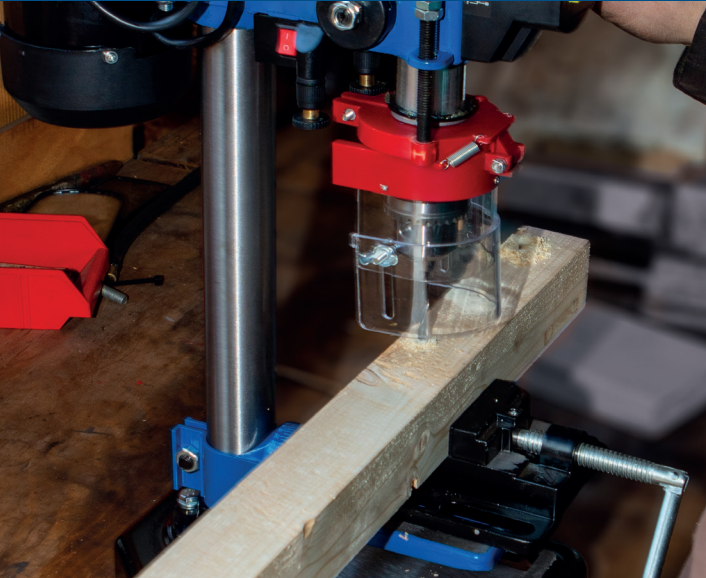

PRODUCT DETAILS

Ergonomic handle



Precision laser



Variable speed
600 – 2650 rpm
can be adjusted in 5 steps



Belt drive



Drilling table can be
adjusted from +45° to -45°




Chuck capacity
1.5 – 13 mm



Heavy weight
ensures sturdy positioning



Powerful 500 W motor



The tried-and-tested gearing principle using the chuck key guarantees high clamping force.

DP16VLS



Traditional manufacturers



The drilling depth can be specified precisely using a scale so it can be reproduced.

