




- ✓ Plunge saw
- ✓ Hand held circular saw
- ✓ Panel sizing saw



Scheppach plunge saw PL75
Category: power tools

8" PROFESSIONAL PLUNGE SAW

- Powerful, thanks to 1600 W motor
- Saw blade with 36 teeth
- Very clean cross section with minimal breakout for laminate
- Efficient extraction of sawdust, thanks to saw blade enclosed by guard
- Suitable for different materials such as solid wood, work tops, MDF panels coated on both sides, laminate etc.
- The best cutting results even without guide rail
- Perfect shadow gaps of 16 mm
- Precise cuts in worktops, solid wood, laminate and plastic
- Handling and weight distribution recommended by tradesmen

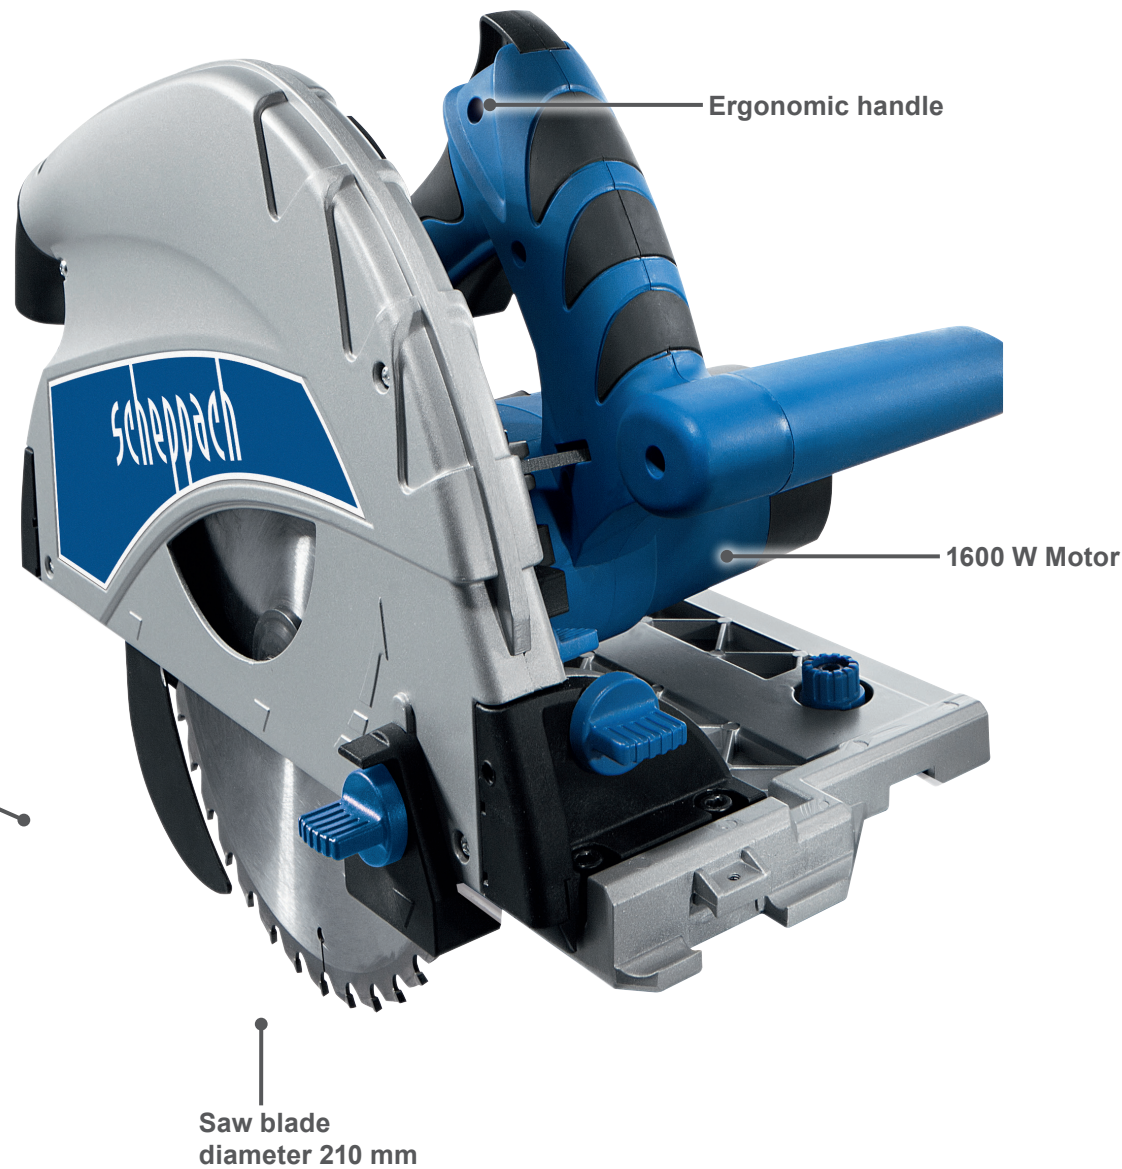

LOGISTICAL DATA

Weight net / gross	6.9 / 7.6 kg
Packaging dimensions	430 x 240 x 315 mm
Article number	5901804901
Barcode	4046664035633
20 Container	830 pcs
40 Container	1680 pcs
40 HQ Container	1920 pcs

SPECIFICATIONS

Dimensions L x W x H	420 x 300 x 235 mm
Blade Ø	210 mm
Arbor Ø	30 mm
Blade speed	4500 rpm
Max. cut 90°	75 mm
Max. cut 45°	55 mm
Bevel capacity	0 – 45°
Distance-to-wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Motor	230 – 240 V~
Input	1600 W



EXAMPLES OF USE

Wooden boards



Planks



Laminate /
panelling




PRODUCT DETAILS

Cutting depth 90°



Cutting depth 45°



Compact design



Lightweight




Saw blade
210 mm x 30 mm x 2,4 mm




Idle speed 4500 rpm



PL75




Conventional
hand-held circular saws



The advantage compared with conventional hand-held circular saws is the plunge function. Using this function, specific demands that require plunging the saw blade into the material can be implemented without problems.

Thanks to stepless adjustment, cuts from 0° to 45° are possible. Tilt protection securely keeps the PL75 on the rail at any angle.

45°

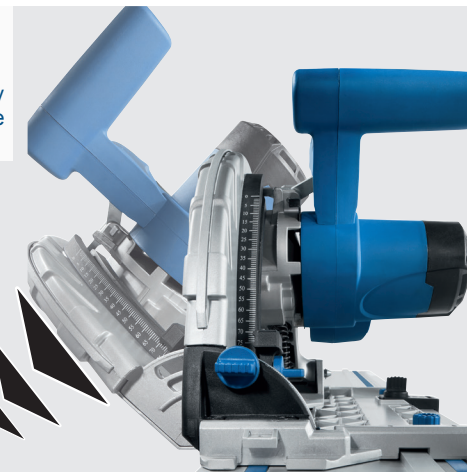

The integrated splinter guard ensures edges without splintering.



With its cutting depth of 75 mm, the PL75 ensures the same precise result as many circular table saws.



This plunge saw is ideal for cut-outs in kitchen work tops and allows precise work without splintering.



Shadow gaps up to 16 mm can be created quickly and safely using the PL75, even in veneered wood, thanks to the splinter guard.