

ROTATING SIEVE

- Suitable for a wide variety of materials
- Sieve drum dia. 400 mm, length 900 mm
- Drum can be set at various angles
- Sieve mesh diameter 20 mm
- Standard sieve insert with a mesh size of 10 mm
- Sieve drum speed 42 rpm
- Throughput depending on material 3 m³/h

HEIMWERKER-TEST.DE



SPECIFICATIONS

Dimensions L x W x H	1080 x 740 x 1400 mm
Throughput (depending on material)	3 m³/h
Sieve drum Ø	400 mm
Sieve drum length	900 mm
Drum inclination	10° / 2 Stufen
Sieve drum speed	42 min ⁻¹
Sieve opening Ø	20 mm
Sieve insert with mesh (size)	10 mm
Motor	230 – 240 V~ / 50 Hz
Motor Output	360 W

LOGISTICAL DATA

Weight net / gross	37 / 44 kg
Packaging dimensions	1040 x 480 x 780 mm
Article number	42030000
Barcode	4014915010975
20 Container	48 pcs
40 Container	96 pcs
40 HQ Container	144 pcs



EXAMPLES OF USE

SUITABLE FOR


Soil



Sand



Compost

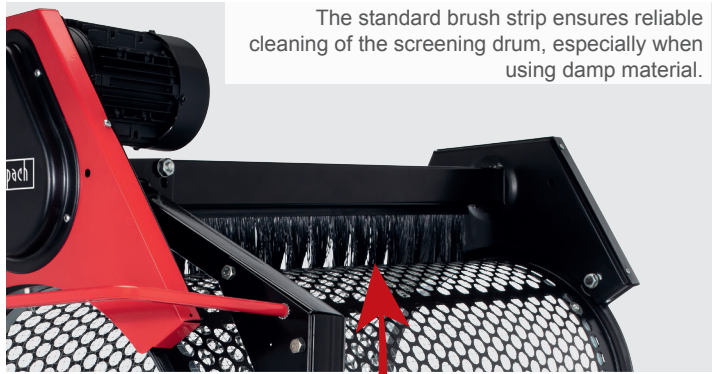

The standard brush strip ensures reliable cleaning of the screening drum, especially when using damp material.




PRODUCT DETAILS

Sieve opening
20 mm




Sieve insert with mesh
10 mm



Up to 3 m³/h sieving capacity



Drum inclination
can be adjusted in 2 steps



Powerful 250 W motor



Speed 42 rpm



The double-ended design of the sieve drum with V-belt completely frees up the feed opening.



0° – 8°

By selecting the drum angle, you can control the speed of the material passing through.



Sieved humus is perfect for creating new beds and for refining or loosening firm, older soil in beds



Thanks to the standard wheels and the low weight of 32 kg, the rotating sieve is mobile and can be used within a wide radius.