


HPD3

IP - concealed

EAN 4007841 067304

Article number 067304

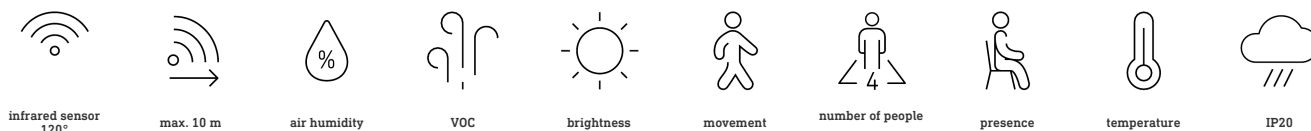

Function description

Next Level Sensor Technology. The HPD3 is designed for ceiling mounting and detects the presence of people in the room, counts and locates them within flexibly definable detection zones. As well as its integrated temperature and humidity sensors, the HPD3 also measures the presence of VOCs. It is the ideal solution for efficient floor space utilisation and the needs-based operation of light, heating and air conditioning. With integrated HF detector and IP interface. IoT link through REST API, MQTT and BacNet. Available in surface-mounted and flush-mounted versions.

Technical specifications

Dimensions (Ø x H)	125 x 52 mm
Power supply, detail	Passive PoE SELV, standard PoE (IEEE 802.3 af)
Sensor Technology	Optical sensor
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,30 – 6,00 m
Reach, radial	Optical sensor: r = 10 m (96 m ²)
Reach, tangential	Optical sensor: r = 10 m (96 m ²)
Reach, presence	Optical sensor: r = 10 m (96 m ²)
Sensor Technology 2	High frequency
HF-system	5,8 GHz
Detection angle	110 °
Angle of aperture	110 °
Optimum mounting height	2,8 m
Mechanical scalability	No

Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Detection	also through glass, wood and stud walls
Twilight setting TEACH	Yes
Twilight setting	2 – 2000 lx
Basic light level function	No
Functions	Motions sensor, Constant-lighting control, Light sensor
Settings via	Bluetooth, Web-Interface
IP-rating	IP20
Ambient temperature	0 – 40 °C
Application, room	lecture hall, classroom, open-plan office, conference room / meeting room, production facilities, recreation room, dining hall / staff restaurant, Indoors
Colour	white
Manufacturer's Warranty	5 years
Version	IP - concealed
PU1, EAN	4007841067304

Optical sensor - Professional Line

HPD3

IP - concealed

EAN 4007841 067304

Article number 067304



Dimension Drawing

