



Panel Suspended Zenith

- Special design luminaire distributes light both up and down, combining comfort and efficiency
- Light up your offices and meeting rooms in an architectural way
- Standard including suspension kit (25m) and separate aluminum colored driver housing



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
DALI2							
140054053	LEDPanelSp-Z L1222-75W-DALI-3000-AL	TL 2x58W	75	7875	105	3000	3.90

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140054053	LEDPanelSp-Z L1222-75W-DALI-3000-AL	94051190	1555x275x55	5.18	6956321877071	1
542098001000	LEDTrunking DALI Power Supply	85044083	198x54x39	0.24	6945730496614	1

Technical Specifications

Lifetime (L70)	60,000 h
Lifetime (L80)	40,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	DALI2
Beam angle	112° up (50%) + down (50%)
Finishing	Aluminum
Colour rendering index (CRI)	> 80
UGR	≤ 19
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties

Housing material	Aluminum
Optical material	PMMA
Cover material	Semi-opaque PMMA

Ambient Conditions

Operating temperature	-20-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C

5 YEARS WARRANTY



ENERGY



OPPLE Lighting
140054053

A
B
C
D
E
F
G

75
kWh/1000h

2019/2015

Dimensional Drawing (mm)

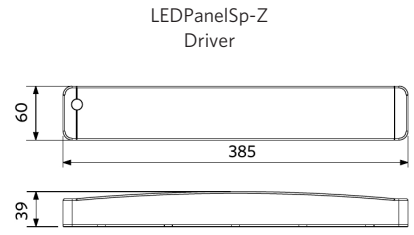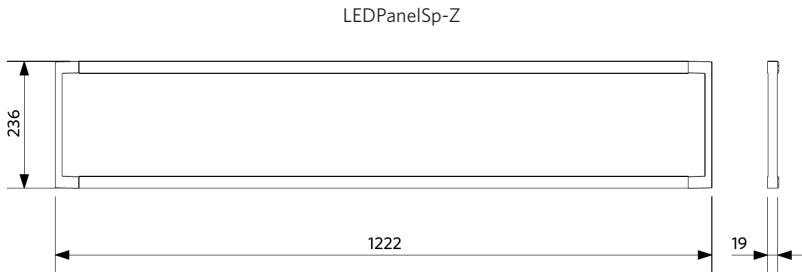

Photometric Data

