



Panel Suspended Zenith

- Special design luminaire distributes light both up and down, combining comfort and efficiency
- Light up your offices and meeting rooms in an architectural way
- Standard including suspension kit (25m) and separate aluminum colored driver housing



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
DALI2							
140054054	LEDPanelSp-Z L1222-75W-DALI-4000-AL	TL 2x58W	75	7875	105	4000	3.90

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140054054	LEDPanelSp-Z L1222-75W-DALI-4000-AL	94051190	1555x275x55	5.18	6956321877088	1
542098001000	LEDTrunking DALI Power Supply	85044083	198x54x39	0.24	6945730496614	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	60,000 h	Frequency	50/60 Hz
Lifetime (L80)	40,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	See catalogue appendix
Colour consistency (SDCM)	3	Connection	See catalogue appendix
Dimmability	DALI2	Specifications	
Beam angle	112° up (50%) + down (50%)	Mechanical Properties	
Finishing	Aluminum	Housing material	Aluminum
Colour rendering index (CRI)	> 80	Optical material	PMMA
UGR	≤ 19	Cover material	Semi-opaque PMMA
Degree of protection (IP)	IP20	Ambient Conditions	
Impact strength	IK02	Operating temperature	-20-+45°C
Protection class	II	Application temperature	+25°C
Risk group (EN 62471)	RG0	Storage environment	-25-+50°C
With control gear	Yes		
Glow wire test	650°C		
Power factor	≥ 0.9		



ENERGY



OPPLE Lighting
140054054

A
B
C
D
E
F
G

75 kWh/1000h

2019/2015

Dimensional Drawing (mm)

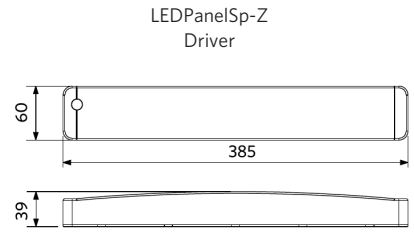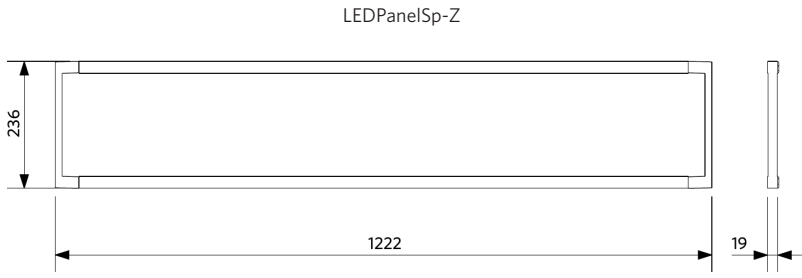

Photometric Data

