



- Full retrofit of existing halogen GU10 lamps
- Light silver coloured
- No UV/IR radiation
- Significantly lower heat output than halogen, avoiding discolouration and risk of damaging goods




## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
Dimmable (Triac)							
140060951	LED-E-GU10-7,5W-3000K-36D-DIM	Halogen 75W		565	75	3000	0.06

## Packaging Information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140060951	LED-E-GU10-7,5W-3000K-36D-DIM	85395200	52x52x62	0.09	6945730493934	1
821017001200	LEDsmart-BLE-Relay-250W-DIM	94059200	90x40x30	0.08	6941408898469	1
821017003600	LEDsmart-BLE2-Relay-250W-DIM	94059200	90x40x30	0.09	6931783007594	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	15,000 h	Frequency	50/60 Hz
On-/Off-cycles	50,000	Nominal voltage	220-240 V
Dimmability	Triac	DC input voltage	No
Beam angle	36°	Ambient Conditions	
Finishing	Silver	Operating temperature	-20-+40°C
Colour rendering index (CRI)	> 80	Application temperature	+25°C
		Storage environment	-25-+50°C

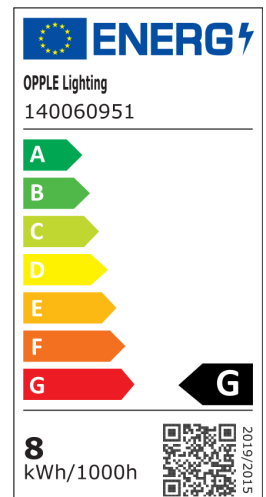

## Dimensional Drawing (mm)

LED-E-GU10-7,5W



## Photometric Data

