



Reflector EcoMax GU10

- Full retrofit of existing halogen GU10 lamps
- Light silver coloured
- No UV/IR radiation
- Significantly lower heat output than halogen, avoiding discolouration and risk of damaging goods



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|-------------------------|-------------------------------|-------------------|-----------|-------|-----------------|---------|----------------|
| Dimmable (Triac) | | | | | | | |
| 140060952 | LED-E-GU10-3,5W-4000K-36D-DIM | Halogen 35W | | 260 | 74 | 4000 | 0.03 |

Packaging Information

| Item | | | Box | | | |
|--------------|-------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 140060952 | LED-E-GU10-3,5W-4000K-36D-DIM | 85395200 | 52x52x62 | 0.06 | 6945730493941 | 1 |
| 821017001200 | LEDsmart-BLE-Relay-250W-DIM | 94059200 | 90x40x30 | 0.08 | 6941408898469 | 1 |
| 821017003600 | LEDsmart-BLE2-Relay-250W-DIM | 94059200 | 90x40x30 | 0.09 | 6931783007594 | 1 |

Technical Specifications


| | |
|------------------------------|----------|
| Lifetime (L70) | 15,000 h |
| On-/Off-cycles | 50,000 |
| Dimmability | Triac |
| Beam angle | 36° |
| Finishing | Silver |
| Colour rendering index (CRI) | > 80 |

Electrical Supply

| | |
|------------------|-----------|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | No |


Ambient Conditions

| | |
|-------------------------|-----------|
| Operating temperature | -20-+40°C |
| Application temperature | +25°C |
| Storage environment | -25-+50°C |

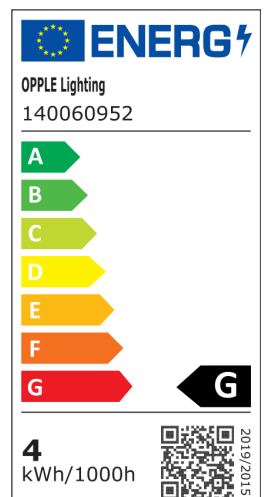

Dimensional Drawing (mm)

LED-E-GU10-3,5W



Photometric Data

