



- Single-ended full IEC compliant LED Tube with patented driver
- Retrofit existing T8 lamps with EM ballast installations ONLY!
- No warm-up time, 100% light instantly when switched on
- Full glass body




SAFE AND EASY INSTALLATION: ONLY USE WITH LED DUMMY STARTER.  
Tubes are NOT suitable for serial installation.

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
<b>On-Off</b>							
140062616	LED P T8 glass 1500 23W 100pct 3000K CT	TL 1x58W		3100	134	3000	0.27

Single-ended connection



## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140062616	LED P T8 glass 1500 23W 100pct 3000K CT	85395200	1589x30x30	0.42	6945730453136	1

**Technical Specifications**

Lifetime (L70)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	220°
Finishing	White
Colour rendering index (CRI)	> 80
Fitting	G13

**Electrical Supply**

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

**Ambient Conditions**

Operating temperature	-25-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C



OPPLE Lighting  
140062616



A  
B  
C  
D  
E  
F  
G

23 kWh/1000h

2019/2015

**Dimensional Drawing (mm)**

LED P T8 glass 1500

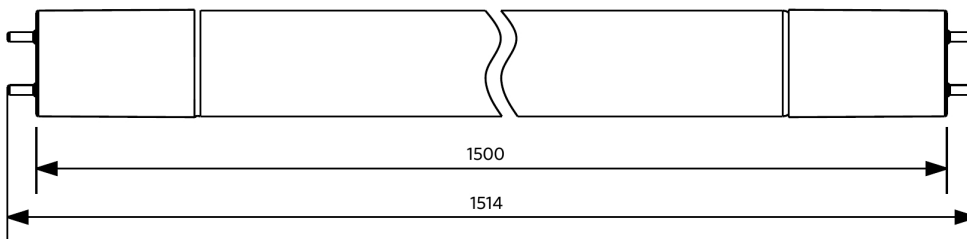

# Photometric Data

