



- Single-ended full IEC compliant LED Tube with patented driver
- Retrofit existing T8 lamps with EM ballast installations ONLY!
- No warm-up time, 100% light instantly when switched on
- Full glass body




SAFE AND EASY INSTALLATION: ONLY USE WITH LED DUMMY STARTER.  
Tubes are NOT suitable for serial installation.

## Specifications

| Item Code | Item Description                        | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|-----------|---|-------------------|-----------|-------|-----------------|---------|----------------|
| On-Off    |   |                   |           |       |                 |         |                |
| 140062617 | LED P T8 glass 1500 23W 100pct 4000K CT | TL 1x58W          |           | 3100  | 134             | 4000    | 0.27           |

Single-ended connection




## Packaging Information

| Item      |   |            | Box                     |                   |               |        |
|-----------|---|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description                        | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN           | pc/box |
| 140062617 | LED P T8 glass 1500 23W 100pct 4000K CT | 85395200   | 1589x30x30              | 0.42              | 6945730453143 | 1      |

| Technical Specifications     |          | Electrical Supply       |           |
|------------------------------|----------|-------------------------|-----------|
| Lifetime (L70)               | 50,000 h | Frequency               | 50/60 Hz  |
| On-/Off-cycles               | 100,000  | Nominal voltage         | 220-240 V |
| Dimmability                  | On-Off   | DC input voltage        | No        |
| Beam angle                   | 220°     | Ambient Conditions      |           |
| Finishing                    | White    |                         |           |
| Colour rendering index (CRI) | > 80     |                         |           |
| Fitting                      | G13      |                         |           |
|                              |          | Operating temperature   | -25-+45°C |
|                              |          | Application temperature | +25°C     |
|                              |          | Storage environment     | -25-+50°C |



**ENERGY**

OPPLE Lighting  
140062617

A

B

C

D

E


F

G

E

23



kWh/1000h



2019/2015

Dimensional Drawing (mm)

LED P T8 glass 1500

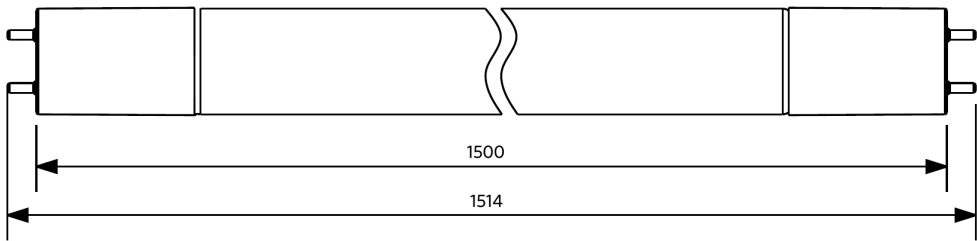

# Photometric Data

