



- Single-ended full IEC compliant LED Tube with patented driver
- Retrofit existing T8 lamps with EM ballast installations ONLY!
- No warm-up time, 100% light instantly when switched on
- Full glass body




SAFE AND EASY INSTALLATION: ONLY USE WITH LED DUMMY STARTER.
Tubes are NOT suitable for serial installation.

Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|---------------|---|-------------------|-----------|-------|-----------------|---------|----------------|
| On-Off | | | | | | | |
| 140062618 | LED P T8 glass 1500 23W 100pct 6500K CT | TL 1x58W | | 3100 | 134 | 6500 | 0.27 |

Single-ended connection



Packaging Information

| Item | | | Box | | | |
|-----------|---|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 140062618 | LED P T8 glass 1500 23W 100pct 6500K CT | 85395200 | 1589x30x30 | 0.42 | 6945730453150 | 1 |

| Technical Specifications | |
|------------------------------|----------|
| Lifetime (L70) | 50,000 h |
| On-/Off-cycles | 100,000 |
| Dimmability | On-Off |
| Beam angle | 220° |
| Finishing | White |
| Colour rendering index (CRI) | > 80 |
| Fitting | G13 |

| Electrical Supply | |
|-------------------|-----------|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | No |

| Ambient Conditions | |
|-------------------------|-----------|
| Operating temperature | -25-+45°C |
| Application temperature | +25°C |
| Storage environment | -25-+50°C |



OPPLE Lighting
140062618



A
B
C
D
E
F
G

23 kWh/1000h

2019/2015

Dimensional Drawing (mm)

LED P T8 glass 1500

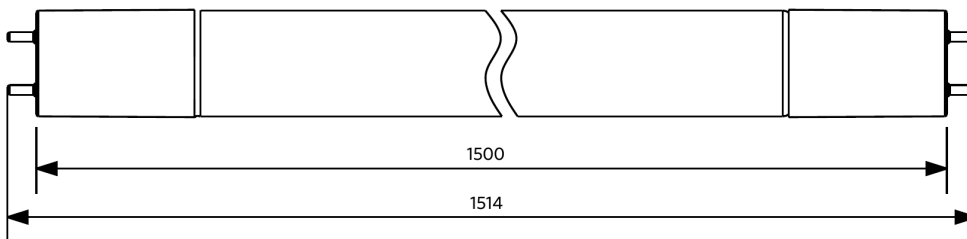

Photometric Data

