



Slim Panel EcoMax UGR22 G2










- High quality LED Slim Panel
- Slim design, suitable for suspension with optional accessory
- Multiple accessories available



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
140062706	LEDPanelRc-S-E2 Re295-34W-3000-WH-U22	TL 2x36W	34	3700	110	3000	2.50

Accessories

Surface Mounting Frame		Recessed Mounting Frame		Mounting-Springs		Suspension-Kit	
							
140055486 LEDPanelRc-SI Re300-Surface-Module-WH-CT	542098017700 LEDPanelRc2 Re300-Surface-Kit-WH	542098009800 LEDPanelRc Re300-Frame-WH	140053150 LEDPanelRc2 Re300-Mounting-Springs	140055365 LEDPanel-SI-E-Suspension-Kit	542098000800 LEDPanelRC-SI U19 EM-kit 1h	542098000900 LEDPanelRC-SI U19 EM-kit 3h	
							
140060852 LEDFixture-Ceiling-Cable-Kit-0.5m	542098030700 Junction-Box-WH						

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140062706	LEDPanelRc-S-E2 Re295-34W-3000-WH-U22	94051190	1320x42x385	3.33	6945730453815	1
140053150	LEDPanelRc-SI-E Mounting-Springs	73209090	70x25x90	0.12	6956712647900	1
140055365	LEDPanel-SI-E-Suspension-Kit	73121020	80x25x120	0.16	6956712682802	1
140055486	LEDPanelRc-SI Re300-Surface-Module-WH-CT	94059900	1290x390x118	4.60	6956321879822	1
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	100x100x5	0.40	6956321895266	1
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1
542098009800	LEDPanelRc Re300-Frame-WH	94059900	388x90x1290	1.93	6941497704047	1
542098017700	LEDPanelRc2 Re300-Surface-Kit-WH	94059900	800x330x230	1.95	6941497720672	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1

Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	120°
Finishing	White RAL9003
Colour rendering index (CRI)	≥ 80
UGR	≤ 22
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No
230V Cable length	1 m

Mechanical Properties

Housing material	Aluminium
Optical material	Polystyrene (PS)
Cover material	Polycarbonate

Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



OPPLE Lighting
140062706

A

B

C

D

E

F

G


F

34
kWh/1000h


2019/2015

Dimensional Drawing (mm)

LEDPanelRc-S-E2 Re295

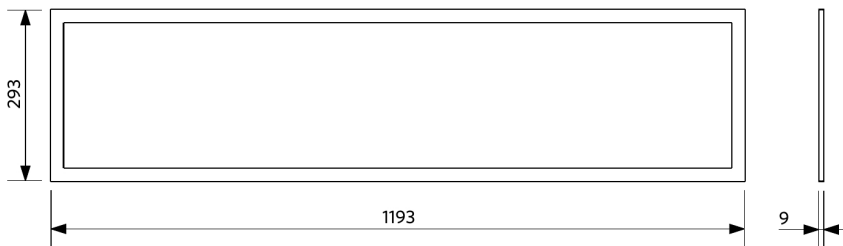

LEDPanelRc-S-E2 Driver

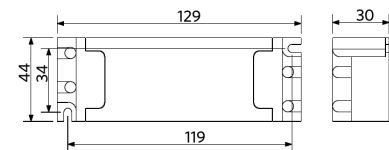

Photometric Data

