



## T8 Batten


- Linear LED batten with uniform light output
- Delivered with clips for surface mounted installation
- Suspension possible with separate accessory kit
- Mechanically connect multiple luminaires via connector accessory
- Energy saving up to 55%



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
140063304	LED T8 Batten 1200mm 38W 3000K CT	TL 2x36W	38	3800	100	3000	0.80

## Accessories



140063307  
LED T8 Batten connector



140063308  
LED T8 Batten suspension Kit

## Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140063304	LED T8 Batten 1200mm 38W 3000K CT	1268x80x80	0.86	6956321860820	1
140063307	LED T8 Batten connector	70x60x90	0.11	6956321860851	1
140063308	LED T8 Batten suspension Kit	100x100x5	0.05	6956321860868	1

## Technical Specifications

Lifetime (L70)	30,000 h
Lifetime (L80)	20,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	120
Finishing	White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

## Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	See catalogue Technical Data section
230V Cable length	1.5 m

## Mechanical Properties

Material housing	Aluminium
------------------	-----------


## Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C

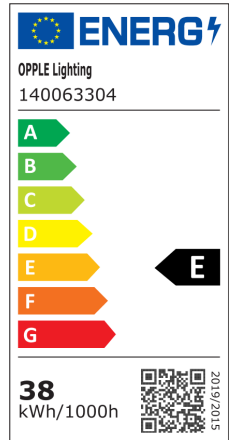

## Dimensional Drawing (mm)

LED T8 Batten 1200mm

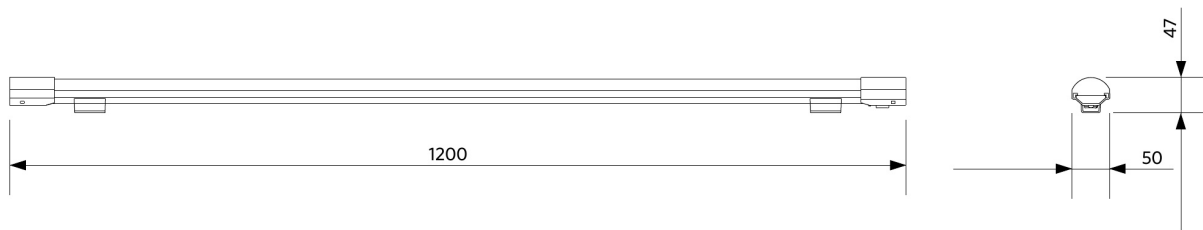

## Photometric Data

