



T8 Batten


- Linear LED batten with uniform light output
- Delivered with clips for surface mounted installation
- Suspension possible with separate accessory kit
- Mechanically connect multiple luminaires via connector accessory
- Energy saving up to 55%



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
140063305	LED T8 Batten 1200mm 38W 4000K CT	TL 2x36W	38	4000	105	4000	0.80

Accessories



140063307
LED T8 Batten connector



140063308
LED T8 Batten suspension Kit

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140063305	LED T8 Batten 1200mm 38W 4000K CT	1268x80x80	0.86	6956321860837	1
140063307	LED T8 Batten connector	70x60x90	0.11	6956321860851	1
140063308	LED T8 Batten suspension Kit	100x100x5	0.05	6956321860868	1

Technical Specifications

Lifetime (L70)	30,000 h
Lifetime (L80)	20,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	120
Finishing	White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	See catalogue Technical Data section
230V Cable length	1.5 m

Mechanical Properties

Material housing	Aluminium
------------------	-----------


Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C

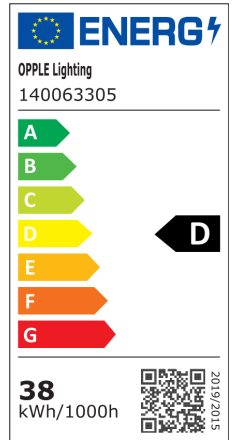

Dimensional Drawing (mm)

LED T8 Batten 1200mm

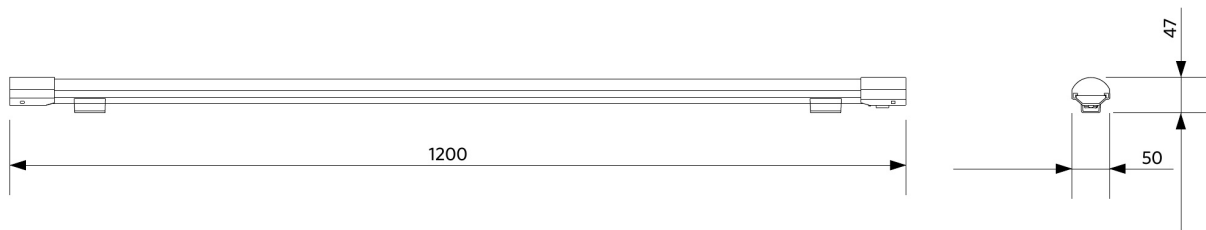

Photometric Data

