



## Porchlight EcoMax

- Easy solution for replacing and renovating existing solutions
- IP65 and high IK10 impact resistance for outdoor application



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	With sensor	Weight (kg/pc)
<b>On-Off</b>								
140064478	LEDPorch-E Re120-5W-4000K-WH	TL 8W	5	500	100	4000	No	0.80

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140064478	LEDPorch-E Re120-5W-4000K-WH	94051190	352x127x96	1.11	6945730403025	1

### Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Sensor type	No sensor
Sensor technology	No sensor
Finishing	White
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP65
Impact strength	IK10
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

### Mechanical Properties

Material housing	Polycarbonate
Optical material	Polycarbonate

### Ambient Conditions

Operating temperature	-30-+50°C
Application temperature	+25°C
Storage environment	-30-+60°C

**5 YEARS WARRANTY**



**ENERGY**

OPPLE Lighting  
140064478

A	→
B	→
C	→
D	→
E	→
F	→
G	→


**F**

**5** kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LEDPorch-E Re120

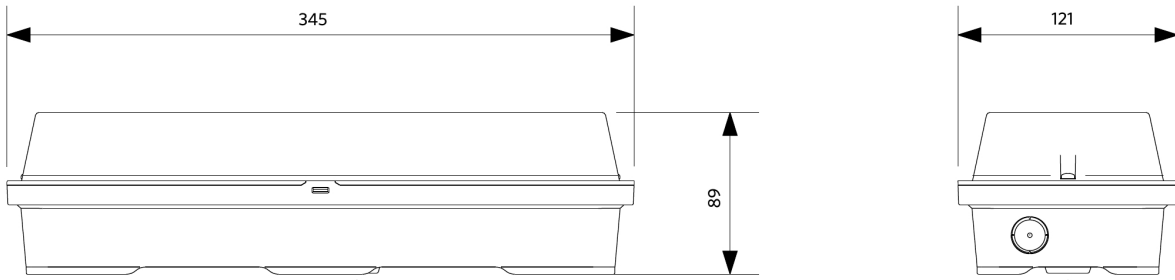

## Photometric Data

