



Filament

- Classic light bulb shape ensures an easy replacement
- Instant 100% light when switched on and no startup time
- No UV / IR radiance so there is less risk of damage



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|-----------------------|------------------------------------|-------------------|-----------|-------|-----------------|---------|----------------|
| A60, Dimmable (Triac) | | | | | | | |
| 500010001000 | LED-E-A60-FILA-E27-7W-DIM-2700K-CL | GLS 60W | | 806 | 115 | 2700 | 0.03 |

Packaging Information

| Item | | | Box | | | |
|--------------|------------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 500010001000 | LED-E-A60-FILA-E27-7W-DIM-2700K-CL | 85395200 | 128x68x68 | 0.08 | 6945730405357 | 1 |
| 821017001200 | LEDsmart-BLE-Relay-250W-DIM | 94059200 | 90x40x30 | 0.08 | 6941408898469 | 1 |
| 821017003600 | LEDsmart-BLE2-Relay-250W-DIM | 94059200 | 90x40x30 | 0.09 | 6931783007594 | 1 |

Technical Specifications

| | |
|------------------------------|----------|
| Lifetime (L70) | 15,000 h |
| On-/Off-cycles | 100,000 |
| Dimmability | Triac |
| Beam angle | 360° |
| Finishing | Clear |
| Colour rendering index (CRI) | > 80 |

Electrical Supply

| | |
|------------------|-----------|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | No |

Ambient Conditions

| | |
|-------------------------|-----------|
| Operating temperature | -20-+40°C |
| Application temperature | +25°C |
| Storage environment | -25-+50°C |



ENERGY

OPPLE Lighting
500010001000


| | |
|---|----------|
| A | |
| B | |
| C | |
| D | |
| E | E |
| F | |
| G | |

7 kWh/1000h

2019/2015

Dimensional Drawing (mm)

LED-E-A60-FILA

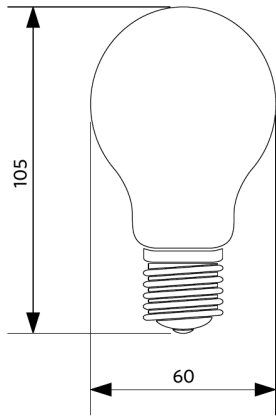

Photometric Data

