



**Filament**

- Classic light bulb shape ensures an easy replacement
- Instant 100% light when switched on and no startup time
- No UV / IR radiance so there is less risk of damage



**Specifications**

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
B35, On-Off							
500011000300	LED-E-B35-FILA-E14-4W-2700K-CL	GLS 40W		470	118	2700	0.01

**Packaging Information**

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
500011000300	LED-E-B35-FILA-E14-4W-2700K-CL	85395200	45x45x100	0.04	6945730433237	1

**Technical Specifications**


Lifetime (L70)	15,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	360°
Finishing	Clear
Colour rendering index (CRI)	> 80

**Electrical Supply**

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No


**Ambient Conditions**

Operating temperature	-20-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C

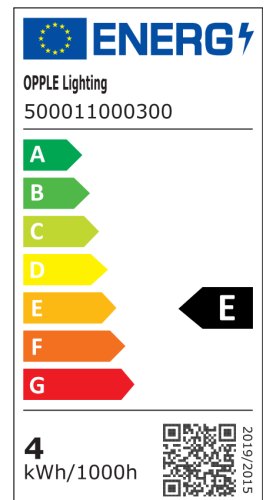

## Dimensional Drawing (mm)

LED-E-B35-FILA

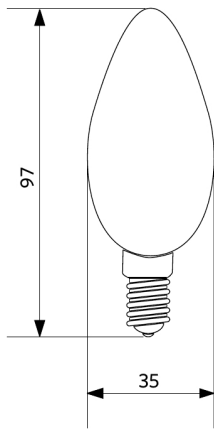

## Photometric Data

