



**Filament**

- Classic light bulb shape ensures an easy replacement
- Instant 100% light when switched on and no startup time
- No UV / IR radiance so there is less risk of damage



**Specifications**

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
ST64, Dimmable (Triac)							
500012000200	LED-E-ST64-FILA-E27-4.5W-DIM-2200K-CL	GLS 40W		400	89	2200	0.05

**Packaging Information**

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
500012000200	LED-E-ST64-FILA-E27-4.5W-DIM-2200K-CL	85395200	68x68x160	0.10	6945730433206	1
821017001200	LEDsmart-BLE-Relay-250W-DIM	94059200	90x40x30	0.08	6941408898469	1
821017003600	LEDsmart-BLE2-Relay-250W-DIM	94059200	90x40x30	0.09	6931783007594	1

Technical Specifications	
Lifetime (L70)	15,000 h
On-/Off-cycles	100,000
Dimmability	Triac
Beam angle	360°
Finishing	Clear
Colour rendering index (CRI)	> 80

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Ambient Conditions	
Operating temperature	-20-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



**ENERGY**

OPPLE Lighting  
500012000200

A

B

C

D

E

F


G

**5** kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LED-E-ST64-FILA

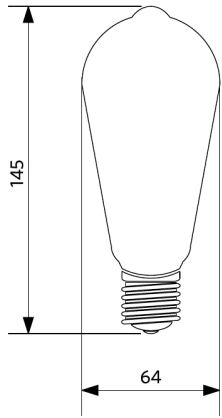

## Photometric Data

