



Ceiling Light Apollo Basic

- Cost effective wall/ceiling luminaire with comfortable diffused light
- IP44, suitable for bathrooms and comparable spaces



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
520021004500	LED HC350 17W 4000K Apollo B	GLS 100W	17	1600	94	4000	0.56

Accessories



140060553
LED Module sensor CT



520098001800
LED Apollo HC350 bracket

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
520021004500	LED HC350 17W 4000K Apollo B	94051190	374x85x375	1.12	6941497707857	1
140060553	LED Module sensor CT	85365005	40x35x80	0.06	6945730491732	1
520098001800	LED Apollo HC350 bracket	94059900	260x53x271	0.32	6941497706614	1

Technical Specifications

Lifetime (L70)	30,000 h
Lifetime (L80)	20,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	120°
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP44
Impact strength	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Mechanical Properties

Housing material	Steel
Optical material	Polycarbonate

Ambient Conditions

Operating temperature	-20-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C



OPPLE Lighting
520021004500


A	▶
B	▶
C	▶
D	▶
E	▶
F	▶
G	▶

F

17
kWh/1000h

2019/2015

Dimensional Drawing (mm)

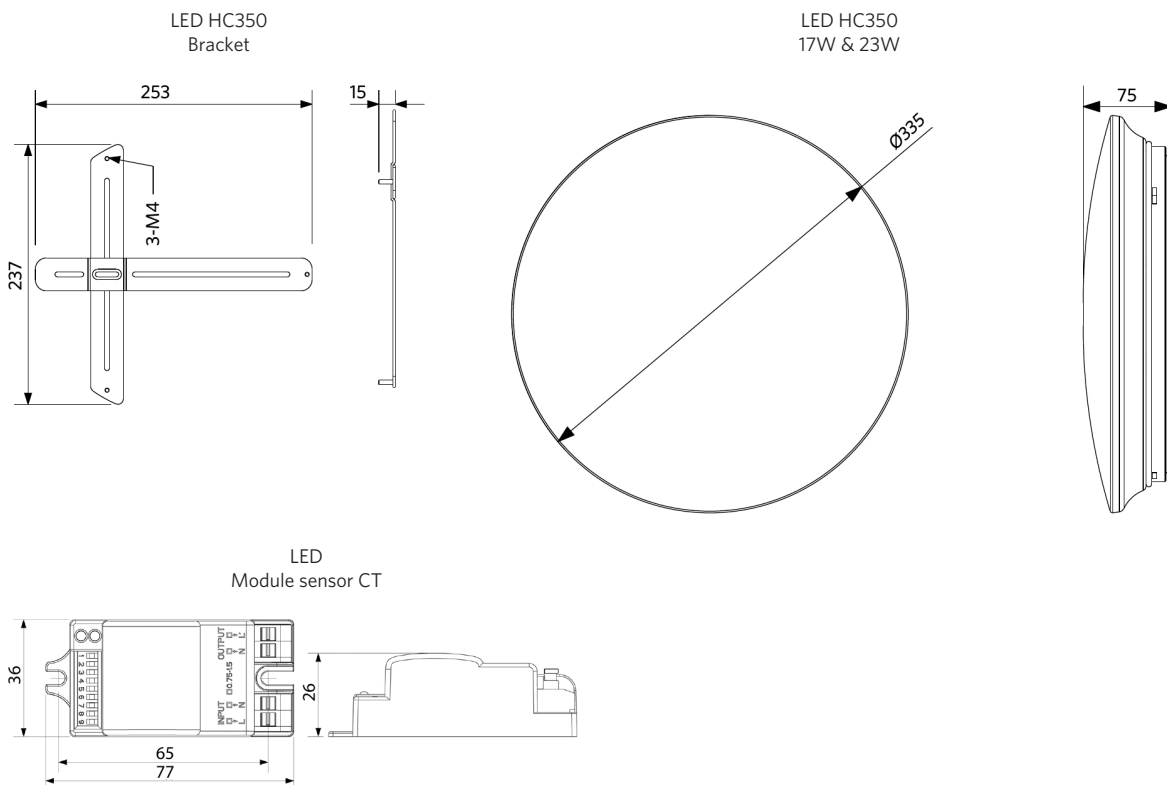

Photometric Data

