



- Cost effective wall/ceiling luminaire with comfortable diffused light
- IP44, suitable for bathrooms and comparable spaces



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
<b>On-Off</b>							
520021004600	LED HC350 23W 2700K Apollo B	GLS 100W	23	2100	91	2700	0.56

## Accessories



140060553  
LED Module sensor CT



520098001800  
LED Apollo HC350 bracket

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
520021004600	LED HC350 23W 2700K Apollo B	94051190	374x85x375	1.12	6941497706607	1
140060553	LED Module sensor CT	85365005	40x35x80	0.06	6945730491732	1
520098001800	LED Apollo HC350 bracket	94059900	260x53x271	0.32	6941497706614	1

Technical Specifications	
Lifetime (L70)	30,000 h
Lifetime (L80)	20,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	120°
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP44
Impact strength	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Mechanical Properties	
Housing material	Steel
Optical material	Polycarbonate

Ambient Conditions	
Operating temperature	-20-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C




**ENERGY**

OPPLE Lighting  
520021004600

**23**  
kWh/1000h

2019/2015

## Dimensional Drawing (mm)

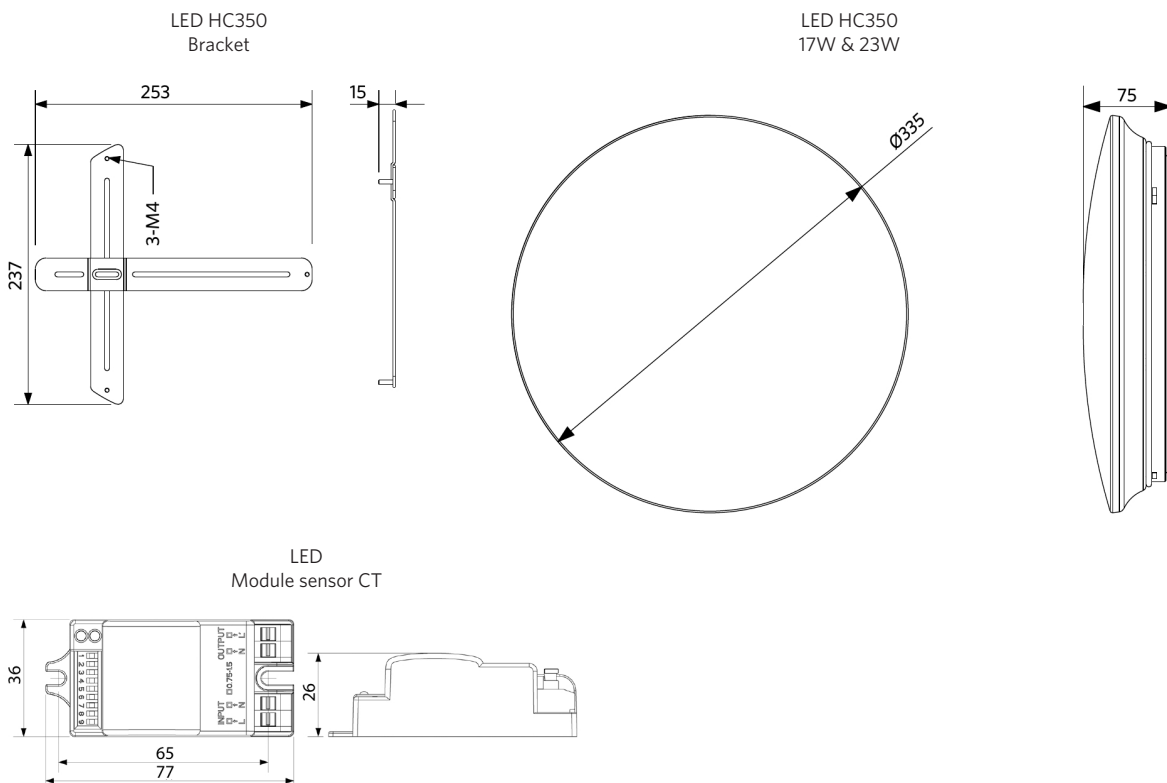

# Photometric Data

