



Ceiling Light Apollo Basic

- Cost effective wall/ceiling luminaire with comfortable diffused light
- IP44, suitable for bathrooms and comparable spaces




Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
520028005700	LED HC260 11W 4000K Apollo B	GLS 75W	11	1050	95	4000	0.27



Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
520028005700	LED HC260 11W 4000K Apollo B	94051190	280x103x280	0.62	6941497707871	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	30,000 h	Frequency	50/60 Hz
Lifetime (L80)	20,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	No
Dimmability	On-Off	Mechanical Properties	
Beam angle	120°	Housing material	Steel
Finishing	White RAL9003	Optical material	Polycarbonate
Colour rendering index (CRI)	> 80	Ambient Conditions	
Degree of protection (IP)	IP44	Operating temperature	-20~+45°C
Impact strength	IK03	Application temperature	+25°C
Protection class	II	Storage environment	-25~+50°C
Risk group (EN 62471)	RG0		
With control gear	Yes		

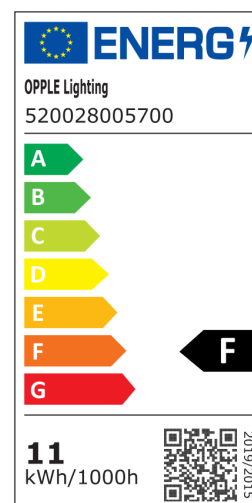

Dimensional Drawing (mm)

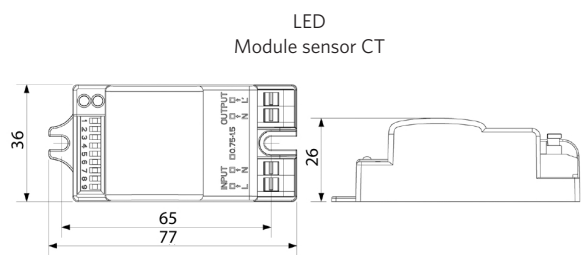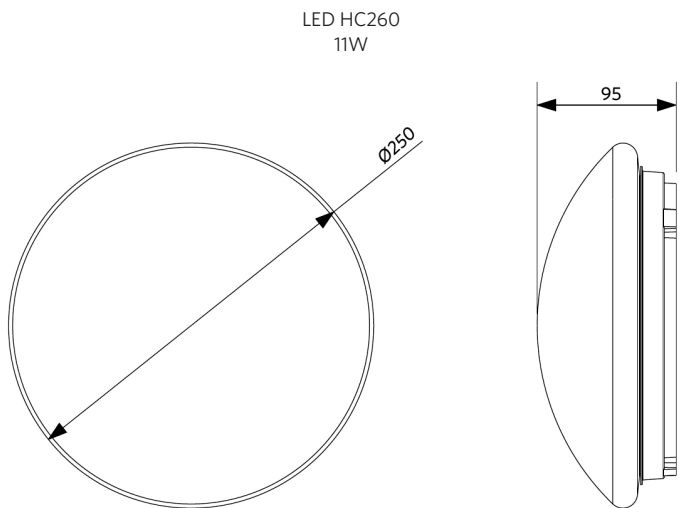

Photometric Data

