



Wall-Mounted EcoMax G2

- Stylish, compact and sturdy wall mounted fixture (IP54+IK08)
- Easy wiring with through-wiring possibility
- Integrated CCT switch for color selection (3000K-4000K)



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	With sensor	Weight (kg/pc)
Emergency version 3 hours, Motion Detection, Daylight Detection								
522020001100	LEDWall-Mounted-E2 Rd275-22W-MD-EM3	CFL 2x26W	22	2500	115	3000/4000	Yes	0.86

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
522020001100	LEDWall-Mounted-E2 Rd275-22W-MD-EM3	94054239	285x285x80	1.14	6941408884202	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	No
Colour consistency (SDCM)	4	Mechanical Properties	
Dimmability	Sensor controlled (MD)	Housing material	Polypropylene (PP)
Sensor type	Motion + Daylight detection (MD)	Optical material	Polypropylene (PP)
Sensor technology	Microwave (MW)	Ambient Conditions	
Finishing	White RAL9016	Operating temperature	
Colour rendering index (CRI)	> 80	Operating temperature EM	0-+45°C
Degree of protection (IP)	IP54	Application temperature	+25°C
Impact strength	IK08	Storage environment	
Protection class	II	Storage environment EM	-20-+25°C
With control gear	Yes		
Glow wire test	850°C		
Power factor	≥ 0.9		



ENERGY

OPPLE Lighting
522020001100

A B C D E F G


E

22
kWh/1000h


2019/2015

Dimensional Drawing (mm)


LEDWall-Mounted-E2 Rd275

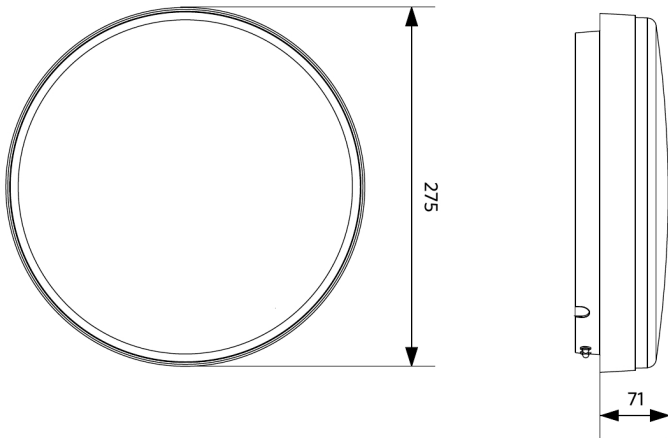

Photometric Data

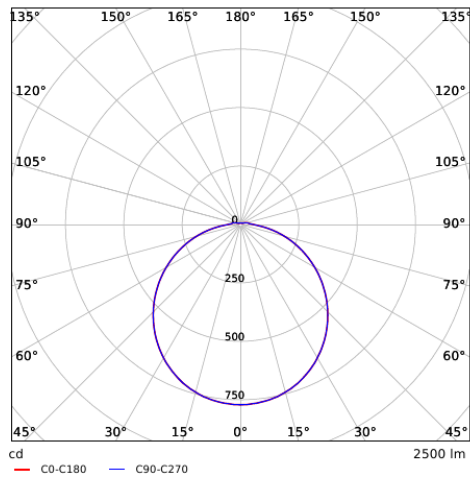

Motion sensors - Detection range

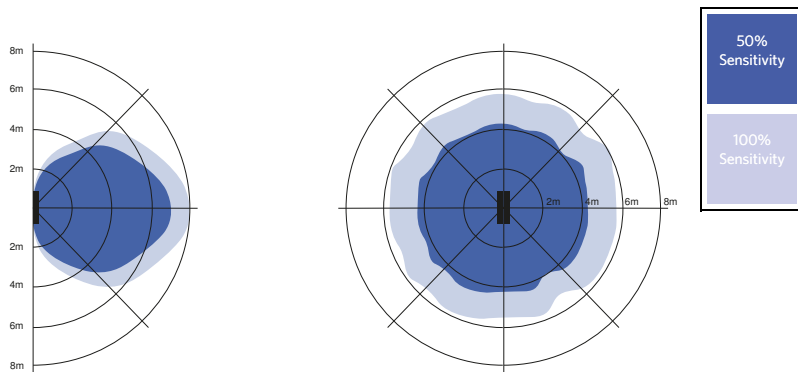

Installation - Wall mounted
Suggested installation height 1-3m

Installation - Ceiling mounted
Suggested installation height 2.5-6m