



## Wall-Mounted EcoMax G2

- Stylish, compact and sturdy wall mounted fixture (IP54+IK08)
- Easy wiring with through-wiring possibility
- Integrated CCT switch for color selection (3000K-4000K)



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	With sensor	Weight (kg/pc)
Emergency version 3 hours, On-Off								
522020001200	LEDWall-Mounted-E2 Rd275-22W-EM3	CFL 2x26W	22	2500	115	3000/4000	No	0.80

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
522020001200	LEDWall-Mounted-E2 Rd275-22W-EM3	94054239	285x285x80	1.08	6941408884196	1

### Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Sensor type	No sensor
Sensor technology	No sensor
Finishing	White RAL9016
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP54
Impact strength	IK08
Protection class	II
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

### Mechanical Properties

Housing material	Polypropylene (PP)
Optical material	Polypropylene (PP)

### Ambient Conditions

Operating temperature	
Operating temperature EM	0-+45°C
Application temperature	+25°C
Storage environment	
Storage environment EM	-20-+25°C



ENERGY

OPPLE Lighting  
522020001200


A	
B	
C	
D	
E	← E
F	
G	

22 kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LEDWall-Mounted-E2 Rd275

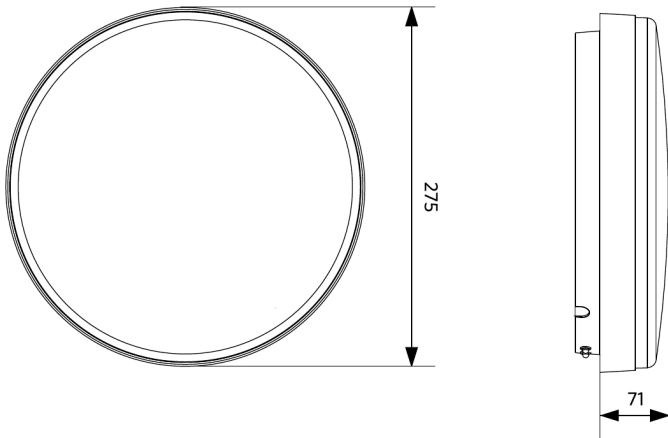

## Photometric Data

