



Wall-Mounted EcoMax G2

- Stylish, compact and sturdy wall mounted fixture (IP54+IK08)
- Easy wiring with through-wiring possibility
- Integrated CCT switch for color selection (3000K-4000K)



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	With sensor	Weight (kg/pc)
Emergency version 3 hours, Motion Detection, Daylight Detection								
522020001300	LEDWall-Mounted-E2 Rd275-14W-MD-EM3	CFL 2x18W	14	1700	120	3000/4000	Yes	0.86

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
522020001300	LEDWall-Mounted-E2 Rd275-14W-MD-EM3	94054239	285x285x80	1.14	6941408884189	1

Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	Sensor controlled (MD)
Sensor type	Motion + Daylight detection (MD)
Sensor technology	Microwave (MW)
Finishing	White RAL9016
Colour rendering index (CRI)	≥ 80
Degree of protection (IP)	IP54
Impact strength	IK08
Protection class	II
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Mechanical Properties

Housing material	Polypropylene (PP)
Optical material	Polypropylene (PP)

Ambient Conditions

Operating temperature	
Operating temperature EM	0-+45°C
Application temperature	+25°C
Storage environment	-20-+25°C
Storage environment EM	-20-+25°C



ENERGY

OPPLE Lighting
522020001300


A	
B	
C	
D	
E	E
F	
G	

14
kWh/1000h


2019/2015

Dimensional Drawing (mm)


LEDWall-Mounted-E2 Rd275

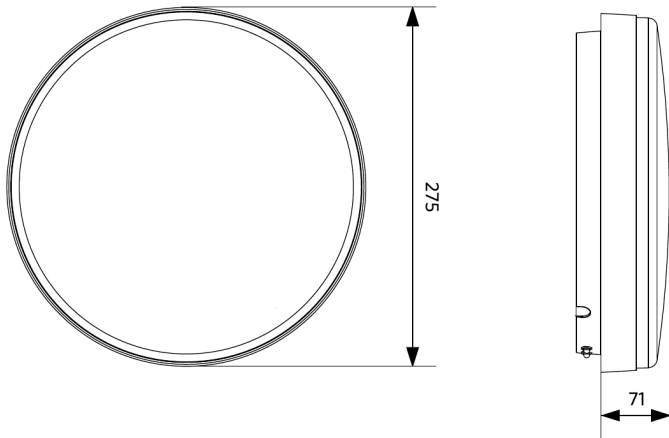

Photometric Data

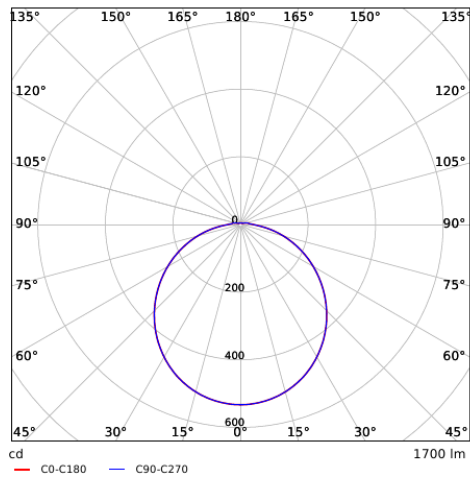

Motion sensors - Detection range

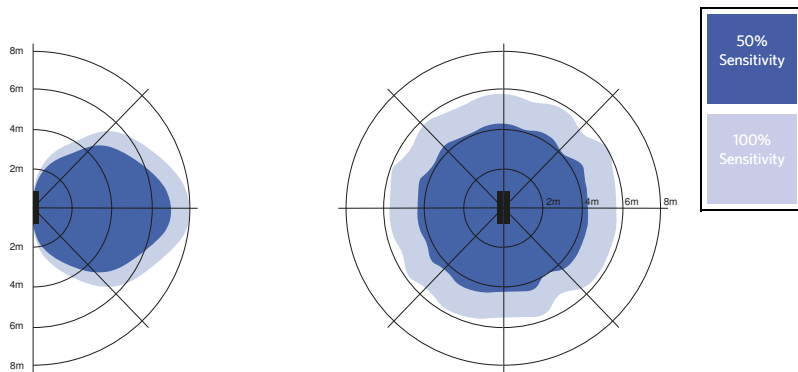

Installation - Wall mounted
Suggested installation height 1-3m

Installation - Ceiling mounted
Suggested installation height 2.5-6m