



- Modern design desk lamp with comfortable light
- Touch-button control for dimming and CCT-change
- Professional anti-glare, honeycomb lens
- Indirect background lighting for increased comfort
- Various scenes/features to enhance ease of use



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|-----------------|----------------------------------|-------------------|-----------|-------|-----------------|----------------|----------------|
| Dimmable | | | | | | | |
| 523003011600 | LEDSparrow-E 15W-DIM-830/840/850 | Halogen 125W | 15 | 1000 | 66 | 3000/4000/5000 | 0.70 |

Packaging Information


| Item | | | Box | | | |
|--------------|----------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 523003011600 | LEDSparrow-E 15W-DIM-830/840/850 | 94051190 | 182x74x430 | 0.75 | 6941491725857 | 1 |

| Technical Specifications | | Electrical Supply | |
|------------------------------|-----------|------------------------------|---------------|
| Lifetime (L70) | 50,000 h | Frequency | 50/60 Hz |
| Lifetime (L80) | 30,000 h | Nominal voltage | 220-240 V |
| On-/Off-cycles | 100,000 | DC input voltage | No |
| Colour consistency (SDCM) | 4 | 230V Cable length | 1.8 m |
| Dimmability | Touch Dim | Mechanical Properties | |
| Beam angle | 140° | Housing material | ABS |
| Finishing | White | Optical material | Polycarbonate |
| Colour rendering index (CRI) | > 80 | Ambient Conditions | |
| Degree of protection (IP) | IP20 | Operating temperature | -10-+45°C |
| Impact strength | IK03 | Application temperature | +25°C |
| Protection class | II | Storage environment | -18-+50°C |
| Risk group (EN 62471) | RG0 | | |
| With control gear | Yes | | |
| Glow wire test | 650°C | | |
| Power factor | ≥ 0.9 | | |



Dimensional Drawing (mm)

LEDSparrow-E

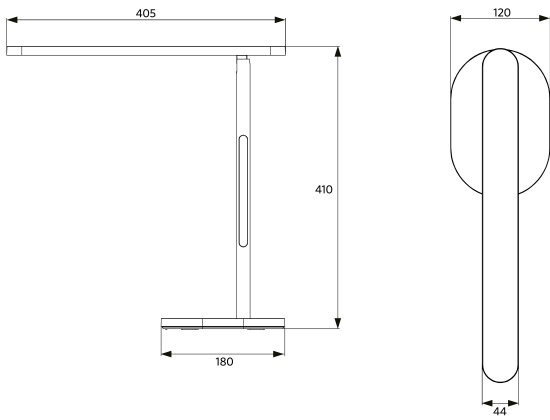

Photometric Data

