



## Ceiling Light Luna

- Stylish and compact ceiling luminaire
- Clean "twist-and-lock" mounting system
- High quality full metal body
- Low height of only 46mm
- Suitable for ceiling and wall mounting



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
<b>On-Off</b>							
540001295100	LEDCEILINGLU-E RD87-9W-830-WH	CFL 1x18W	9	810	90	3000	0.10

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
540001295100	LEDCEILINGLU-E RD87-9W-830-WH	94051190	90x52x94	0.16	6941408895888	1

### Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	100°
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Displacement factor (DF)	≥ 0.9

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

### Mechanical Properties

Housing material	Aluminum
Optical material	Polycarbonate


### Ambient Conditions

Operating temperature	-10-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C



## Dimensional Drawing (mm)

LEDCeilingLu-E Rd87

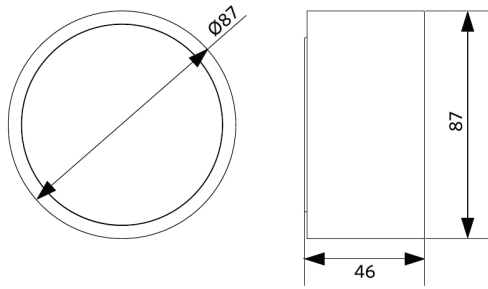

## Photometric Data

