



## Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks – and many other standard types
- Low glare due to matte black anti-glare ring
- Honeycomb filters available for further glare reduction



## Specifications

| Item Code        | Item Description                 | Equivalent to (W) | Power (W) | Lumen | Luminaire efficacy | CCT (K) | Weight (kg/pc) |
|------------------|----------------------------------|-------------------|-----------|-------|--------------------|---------|----------------|
| Dimmable (Triac) |                                  |                   |           |       |                    |         |                |
| 541001069600     | LEDSpot3C-C-P 10W-Dim-930-36D-BL | Halogen 100W      | 10        | 1200  | 120                | 3000    | 0.44           |

## Accessories



550098001000  
LEDSpot3C-C-P R65-Reflector-24D



599007083000  
LEDSpot3C-C-P R65-Honeycomb

## Packaging Information

| Item         |                                  |            | Box                     |                   |               |        |
|--------------|----------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code    | Item Description                 | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN           | pc/box |
| 541001069600 | LEDSpot3C-C-P 10W-Dim-930-36D-BL | 94051190   | 280x100x120             | 0.63              | 6941408832814 | 1      |
| 550098001000 | LEDSpot3C-C-P R65-Reflector-24D  | 94059200   | 75x75x40                | 0.01              | 6941408832869 | 1      |
| 599007083000 | LEDSpot3C-C-P R65-Honeycomb      | 94059200   | 62x62x10                | 0.16              | 6941408896700 | 1      |
| 821017001200 | LEDSmart-BLE-Relay-250W-DIM      | 94059200   | 90x40x30                | 0.08              | 6941408898469 | 1      |
| 821017003600 | LEDSmart-BLE2-Relay-250W-DIM     | 94059200   | 90x40x30                | 0.09              | 6931783007594 | 1      |

| Technical Specifications     |             |
|------------------------------|-------------|
| Lifetime (L70)               | 70,000 h    |
| Lifetime (L80)               | 50,000 h    |
| On-/Off-cycles               | 100,000     |
| Colour consistency (SDCM)    | 4           |
| Dimmability                  | Triac       |
| Beam angle                   | 36°         |
| Maximum tilt angle           | 85°         |
| Finishing                    | Matte Black |
| Colour rendering index (CRI) | > 90        |
| Degree of protection (IP)    | IP20        |
| Impact strength              | IK03        |
| Protection class             | I           |
| Risk group (EN 62471)        | RG1         |
| With control gear            | Yes         |
| Glow wire test               | 650°C       |
| Power factor                 | ≥ 0.9       |

| Electrical Supply |  |
|-------------------|--|
| Frequency         | 50/60 Hz   |
| Nominal voltage   | 220-240 V  |
| DC input voltage  | See catalogue appendix Connection Specifications |

| Mechanical Properties |               |
|-----------------------|---------------|
| Housing material      | Aluminium     |
| Optical material      | Aluminum      |
| Lens material         | Polycarbonate |

| Ambient Conditions      |           |
|-------------------------|-----------|
| Operating temperature   | -10-+40°C |
| Application temperature | +25°C     |
| Storage environment     | -25-+50°C |



**ENERGY**


OPPLE Lighting  
541001069600

**12**  
kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LEDspot3C-C-P 10W-Dim

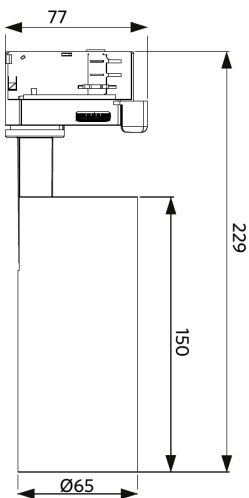

## Photometric Data

