



Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks - and many other standard types



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Luminaire efficacy	CCT (K)	Weight (kg/pc)
On-Off, CCT Switch (CS)							
541001186600	LEDSpot3C-C-CS 20W-930/940/950-36D-WH	HID 35W	20	1800/2000/1800	90/100/90	3000/4000/5000	0.66

Accessories



541001187900
LEDSpot3C-C-CS R68-Reflector-24D

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541001186600	LEDSpot3C-C-CS 20W-930/940/950-36D-WH	94051190	300x105x90	0.84	6931783033876	1
541001187900	LEDSpot3C-C-CS R68-Reflector-24D	94051190	265x265x135	1.58	6931783033982	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	36°
Maximum tilt angle	85°
Finishing	Matte White
Colour rendering index (CRI)	> 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties

Housing material	Aluminium
Optical material	Aluminum
Lens material	Polycarbonate


Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



Dimensional Drawing (mm)

LEDSpot3C-C-CS 20W

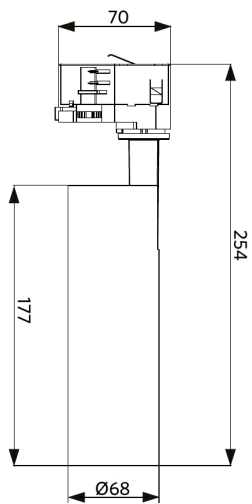

Photometric Data

