



- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks - and many other standard types



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Luminaire efficacy	CCT (K)	Weight (kg/pc)
<b>On-Off, CCT Switch (CS)</b>							
541001186800	LEDSpot3C-C-CS 30W-930/940/950-36D-WH	HID 50W	30	2550/2850/2550	85/95/85	3000/4000/5000	0.82

## Accessories



541001188000  
LEDSpot3C-C-CS R75-Reflector-24D

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541001186800	LEDSpot3C-C-CS 30W-930/940/950-36D-WH	94051190	320x105x95	1.02	6931783033890	1
541001188000	LEDSpot3C-C-CS R75-Reflector-24D	94051190	325x325x185	3.30	6931783033999	1

**5 YEARS WARRANTY**



Technical Specifications	
Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	36°
Maximum tilt angle	85°
Finishing	Matte White
Colour rendering index (CRI)	> 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9


Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Aluminium
Optical material	Aluminum
Lens material	Polycarbonate

Ambient Conditions	
Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C

## Dimensional Drawing (mm)

LEDSpot3C-C-CS 30W

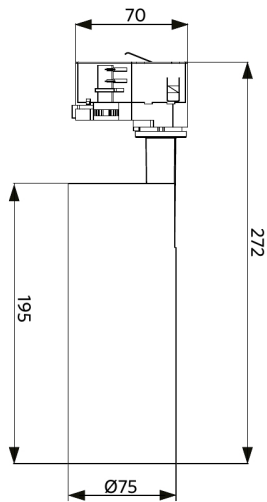

## Photometric Data

