



Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks – and many other standard types



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Luminaire efficacy	CCT (K)	Weight (kg/pc)
On-Off, CCT Switch (CS)							
541001186900	LEDSpot3C-C-CS 30W-930/940/950-36D-BL	HID 50W	30	2550/2850/2550	85/95/85	3000/4000/5000	0.82

Accessories



541001188000
LEDSpot3C-C-CS R75-Reflector-24D

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541001186900	LEDSpot3C-C-CS 30W-930/940/950-36D-BL	94051190	320x105x95	1.02	6931783033906	1
541001188000	LEDSpot3C-C-CS R75-Reflector-24D	94051190	325x325x185	3.30	6931783033999	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	36°
Maximum tilt angle	85°
Finishing	Matte Black
Colour rendering index (CRI)	> 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties

Housing material	Aluminium
Optical material	Aluminum
Lens material	Polycarbonate


Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



Dimensional Drawing (mm)

LEDspot3C-C-CS 30W

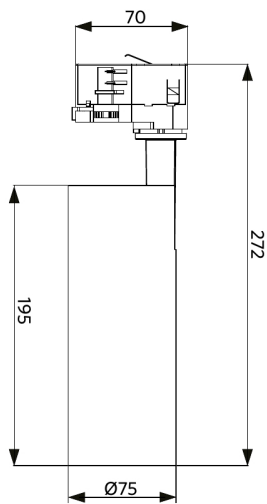

Photometric Data

