



Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks - and many other standard types



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Luminaire efficacy	CCT (K)	Weight (kg/pc)
On-Off, CCT Switch (CS)							
541001187500	LEDSpot3C-C-CS 10W-930/940/950-36D-BL	Halogen 100W	10	900/1000/900	90/100/90	3000/4000/5000	0.37

Accessories



541001187800
LEDSpot3C-C-CS R47-Reflector-24D

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541001187500	LEDSpot3C-C-CS 10W-930/940/950-36D-BL	94051190	275x105x70	0.63	6931783033869	1
541001187800	LEDSpot3C-C-CS R47-Reflector-24D	94051190	170x170x100	0.60	6931783033975	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Beam angle	36°
Maximum tilt angle	85°
Finishing	Matte Black
Colour rendering index (CRI)	> 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties

Housing material	Aluminium
Optical material	Aluminum
Lens material	Polycarbonate


Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



Dimensional Drawing (mm)

LEDSpot3C-C-CS 10W

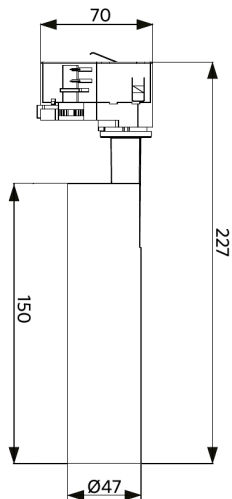

Photometric Data

