




- Powerful recessed, rotatable and tiltable spot
- Clean and compact design ideal for retail shops, showrooms, and hospitality environments
- Die-cast aluminium housing
- Excellent colour rendering with CRI 90



Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Beam angle | Weight (kg/pc) |
|--------------|---------------------------------|-------------------|-----------|-------|-----------------|---------|------------|----------------|
| 1-10V | | | | | | | | |
| 541003102300 | LEDSpotRS-P 35W-3000-60D-WH-10V | HID 50W | 35 | 3150 | 90 | 3000 | 60° | 1.13 |

Accessories



140060651
LEDDownlightRc-HZdim-Adapter-175-200



542098030700
Junction-Box-WH

Packaging Information

| Item | | | Box | | | |
|--------------|--------------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 541003102300 | LEDSpotRS-P 35W-3000-60D-WH-10V | 94051190 | 200x200x150 | 1.39 | 6941408826202 | 1 |
| 140060651 | LEDDownlightRc-HZdim-Adapter-175-200 | 94059900 | 225x225x0.8 | 0.20 | 6956321894177 | 1 |
| 542098030700 | Junction-Box-WH | 85369010 | 43x103.4x26 | 0.06 | 6941408868684 | 1 |

| Technical Specifications | |
|------------------------------|----------|
| Lifetime (L70) | 70,000 h |
| Lifetime (L80) | 50,000 h |
| On-/Off-cycles | 100,000 |
| Colour consistency (SDCM) | 3 |
| Dimmability | 1-10V |
| Maximum tilt angle | 40° |
| Finishing | White |
| Colour rendering index (CRI) | > 90 |
| Degree of protection (IP) | IP20 |
| Impact strength | IK03 |
| Protection class | II |
| Risk group (EN 62471) | RG1 |
| With control gear | Yes |
| Glow wire test | 650°C |
| Power factor | ≥ 0.9 |

| Electrical Supply | |
|-------------------|--|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V |
| DC input voltage | See catalogue appendix Connection Specifications |
| 230V Cable length | 0.3 m |

| Mechanical Properties | |
|-----------------------|------------|
| Housing material | Aluminum |
| Optical material | Dome shape |

| Ambient Conditions | |
|-------------------------|-----------|
| Operating temperature | -10-+45°C |
| Application temperature | +25°C |
| Storage environment | -25-+50°C |



ENERGY



OPPLE Lighting
541003102300

35
kWh/1000h


2019/2015

Dimensional Drawing (mm)


LEDspotRS-P 35W

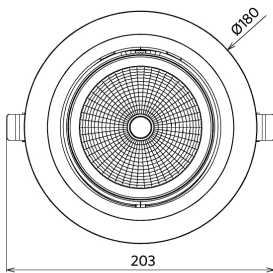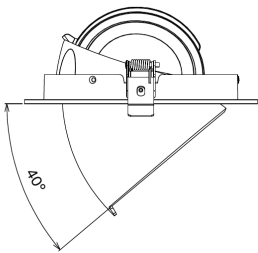


LEDspotRS-P 35W
Driver On/Off

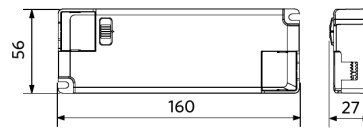

LEDspotRS-P 35W
Driver Dim

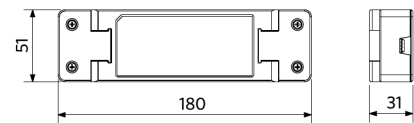

Photometric Data

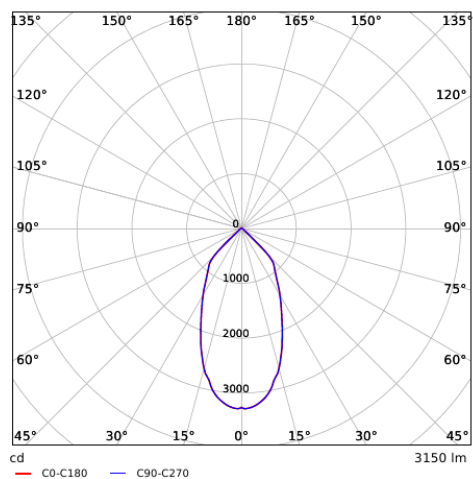

Installation Opening Drawing (mm)

LEDSpotRS -P 35W
Ø160-175

