



## Surface Spot Selena

- Stylish and compact surface mounted spot
- Clean "twist-and-lock" mounting system
- High quality full metal body
- Standard CRI 90



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
Dimmable (Triac), Fixed							
541003590500	LEDSpotRF-Selena-E 7W-DIM-930-55D-BL	Halogen 50W	7	560	80	3000	0.38

## Accessories



821017003600  
LEDSmart-BLE2-Relay-250W-DIM

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541003590500	LEDSpotRF-Selena-E 7W-DIM-930-55D-BL	94051190	81x81x115	0.43	6941497787224	1
821017003600	LEDSmart-BLE2-Relay-250W-DIM	94059200	90x40x30	0.09	6931783007594	1

### Technical Specifications

Lifetime (L70)	50,000 h
Lifetime (L80)	30,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	Triac
Beam angle	55°
Maximum tilt angle	n/a
Finishing	Matte Black
Colour rendering index (CRI)	> 90
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

### Mechanical Properties

Housing material	Aluminum
Optical material	Polycarbonate

### Ambient Conditions


Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C

**5 YEARS WARRANTY**



## Dimensional Drawing (mm)

LEDSpotRF-Selena-E 7W-DIM

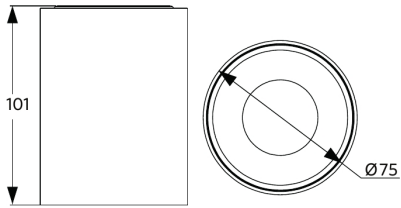

## Photometric Data

