



## Slim Panel Performer UGR19 G5

- Premium side-lit LED Slim Panel, suitable for offices (UGR19)
- Ultra-slim panel (9mm), ideal for suspended use
- Recessed, suspended and surface mounting possible



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Colour rendering index (CRI)	Weight (kg/pc)
<b>On-Off</b>								
542004068800	LEDPanelRc-S5 Sq620-30W-865-U19	TL 4x18W	30	3900	130	6500	> 80	2.62

## Accessories



542098006900  
LEDPanel-S4-Suspension-Kit



542098000800  
LEDPanelRC-SI U19 EM-kit 1h  
  
542098000900  
LEDPanelRC-SI U19 EM-kit 3h



140060852  
LEDFixture-Ceiling-Cable-Kit-0.5m



542098030700  
Junction-Box-WH

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542004068800	LEDPanelRc-S5 Sq620-30W-865-U19	94051190	688x722x46	3.75	6941497735843	1
140055485	LEDPanelRc-SI Sq625-Surface-Module-WH-CT	94059900	715x715x118	4.77	6956321879815	1
140057771	LEDPanelRc-SI-Mounting-Springs-622	73209090	80x80x53	0.16	6956321888138	1
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	100x100x5	0.40	6956321895266	1
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1
542098006900	LEDPanel-S4-Suspension-Kit	73121020	130x130x30	0.22	6941497701428	1
542098009700	LEDPanelRc Sq625-Frame-WH	94059900	715x88x721	1.84	6941497704054	1
542098017500	LEDPanelRc2 Sq625-Surface-Kit-WH	94059900	812x77x68	1.59	6941497720689	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	On-Off
Beam angle	85°
Finishing	White RAL9003
UGR	≤ 19
IP front side	IP54
IP recessed part	IP20
Impact strength	IK04
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0,9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	1 m

Mechanical Properties	
Housing material	Aluminum
Optical material	PMMA
Cover material	Polystyrene (PS)

Ambient Conditions	
Operating temperature	-20-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



**ENERGY**  
 OPPLÉ Lighting  
 542004068800


A  
 B  
 C  
 D  
 E  
 F  
 G

**30**  
 kWh/1000h


2019/2015

## Dimensional Drawing (mm)


LEDPanelRc-S5 Sq620

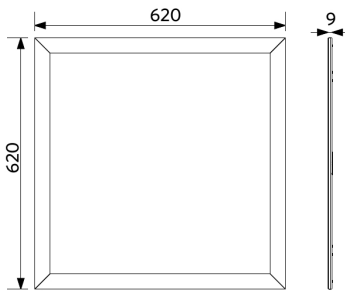

LEDPanelRc-S5  
 Driver On/Off

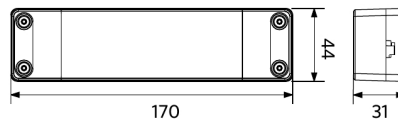

LEDPanelRc-S5  
 Driver Dim

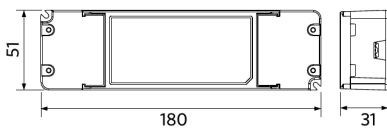

LEDPanelRc-S5  
 Driver Tunable White



## Photometric Data

