



Panel Suspended Riga

- Stylish direct/indirect suspended LED panel
- Clean minimalistic design
- Low Glare UGR19, suitable for office spaces
- Flexible due to 3000/4000K CCT and Power Switch



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
DALI2							
542004095200	LED Riga-P Re295-34/40W-DALI-830/840	TL 4x18W	34/40	4420/5200	130	3000/3500/4000	3.60


Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542004095200	LED Riga-P Re295-34/40W-DALI-830/840	94051190	1310x50x390	4.23	6931783034019	1
542098001000	LED Trunking DALI Power Supply	85044083	198x54x39	0.24	6945730496614	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	70,000 h	Frequency	50/60 Hz
Lifetime (L80)	50,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	See catalogue appendix
Colour consistency (SDCM)	4	Connection	See catalogue appendix
Dimmability	DALI2	Specifications	
Beam angle	115° up (30%) + 90° down (70%)	Mechanical Properties	
Finishing	White RAL9003	Housing material	Aluminum
Colour rendering index (CRI)	> 80	Optical material	PMMA
UGR	≤ 19	Cover material	PMMA
Degree of protection (IP)	IP20	Ambient Conditions	
Impact strength	IK02	Operating temperature	-10--+35°C
Protection class	II	Application temperature	+25°C
Risk group (EN 62471)	RG0	Storage environment	-25--+50°C
With control gear	Yes		
Glow wire test	650°C		
Power factor	≥ 0.9		



Dimensional Drawing (mm)

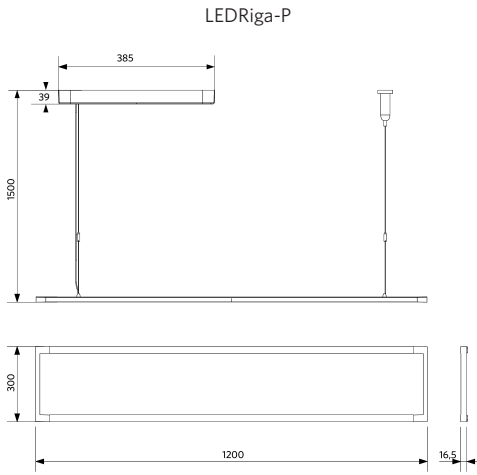

Photometric Data

