



Panel Suspended Riga

- Stylish direct/indirect suspended LED panel
- Clean minimalistic design
- Low Glare UGR19, suitable for office spaces
- Flexible due to 3000/4000K CCT and Power Switch



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
Smart							
542004095300	LEDRiga-P Re295-34/40W-BLE2-830/840	TL 4x18W	34/40	4420/5200	130	3000/3500/4000	3.50

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542004095300	LEDRiga-P Re295-34/40W-BLE2-830/840	94051190	1310x50x390	4.13	6931783034026	1
560098000600	LEDSmart-Sensor Surface-Module-WH	94059200	330x220x255	0.15	6941497703972	1
821006001800	LEDSmart-BLE2-Rc-MW-Sensor	85365005	100x100x130	0.19	6941497778277	1
821006002000	LEDSmart-BLE2-Rc-PIR-Sensor	85365005	100x100x70	0.19	6941497778260	1
821009000200	LEDSmart-BLE2-Switch	85365005	89x21x101	0.10	6941497778253	1
821011002600	LEDSmart-BLE2-DALI-Connect-Box	85176200	100x60x105	0.30	6941497778291	1
821017003400	LEDSmart-BLE2-Multi-Switch-Module	94059200	46x46x30	0.07	6931783007600	1
821017003800	LEDSmart-BLE2-Relay-1000W	85364900	110x57x37	0.10	6941497778284	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	BLE2
Beam angle	115° up (30%) + 90° down (70%)
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
UGR	≤ 19
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix
Connection	See catalogue appendix
Specifications	See catalogue appendix

Mechanical Properties


Housing material	Aluminum
Optical material	PMMA
Cover material	PMMA

Ambient Conditions

Operating temperature	-10-+35°C
Application temperature	+25°C
Storage environment	-25-+50°C



Dimensional Drawing (mm)

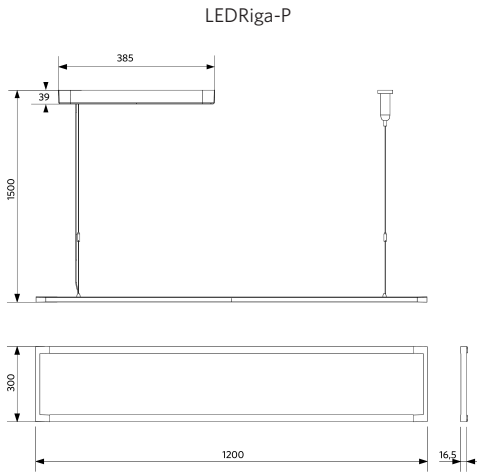

Photometric Data

