



## Highbay Performer G5

- High quality LED Highbay solution with improved ultra slim design
- Improved efficacy of 160 lm/W
- Equipped with breather to prevent condensation
- Equipped with IP68 connector



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Weight (kg/pc)
<b>On-Off</b>								
545001068200	LEDHighbay-P5 80W-840-N	HID 250W	80	12800	160	4000	60°	2.68

## Accessories



545098000500  
LEDHighbay-P4 Bracket-D330



545098003500  
LEDHighbay-P4 Reflector-D330



543098021900  
LEDFixture-IP68-Connector-Kit-3



545098003200  
LEDHighbay-Pole and Adapter

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
545001068200	LEDHighbay-P5 80W-840-N	94051190	374x374x131	3.00	6941497775276	1
543098021900	LEDFixture-IP68-Connector-Kit-3	39174000	265x245x205	0.08	6941497708991	1
545098000500	LEDHighbay-P4 Bracket-D330	94059900	163x56x198	0.50	6956321806620	1
545098003200	LEDHighbay-Pole and Adapter	94059900	54.9x335x40	0.61	6941497722324	1
545098003500	LEDHighbay-P4 Reflector-D330	94059900	570x570x210	1.48	6941497726216	1

Technical Specifications	
Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
Lifetime (L80) HT	h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Finishing	Grey Pantone 417U
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP66
Impact strength	IK08
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9
Surge protection	4 kV

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	1 m

Mechanical Properties	
Housing material	Aluminum
UV resistant	Yes
Optical material	Polycarbonate
Cover material	Polycarbonate


Ambient Conditions	
Operating temperature	-30-+50°C
Operating temperature HT	
Application temperature	+25°C
Storage environment	-30-+60°C

**5 YEARS WARRANTY**




## Dimensional Drawing (mm)


LEDHighbay-P5  
80W & 110W

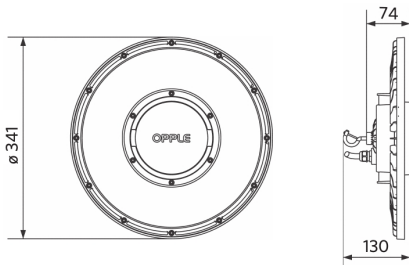


LEDHighbay-P5  
130W & 150W & 200 & 240W

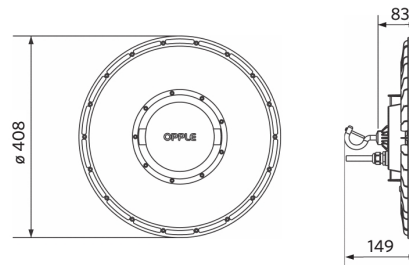


LEDHighbay-P5  
Reflector-D330

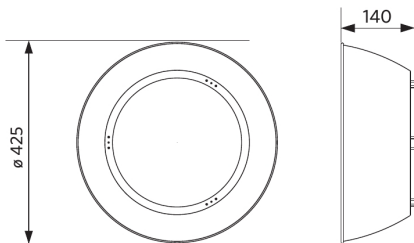


LEDHighbay-P5  
Reflector-D420

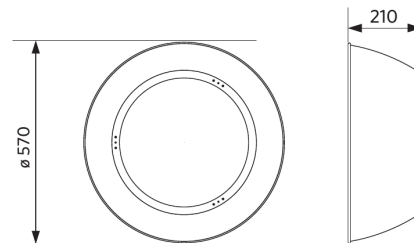

LEDHighbay-P5  
Bracket-D330

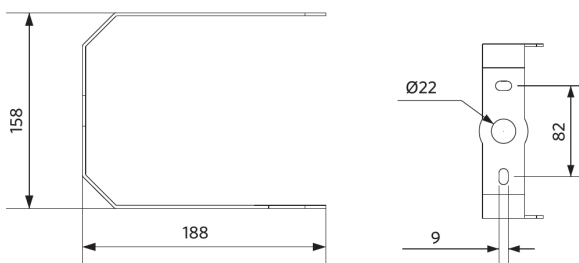

LEDHighbay-P5  
Bracket-D420

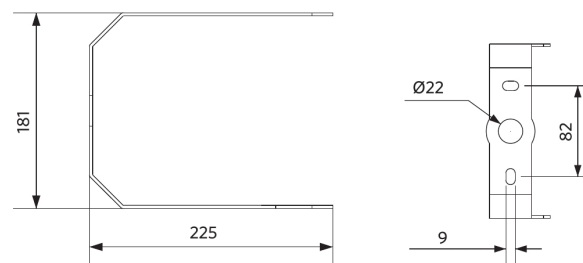

# Photometric Data

