



## Highbay Performer G5

- High quality LED Highbay solution with improved ultra slim design
- Improved efficacy of 160 lm/W
- Equipped with breather to prevent condensation
- Equipped with IP68 connector



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Weight (kg/pc)
On-Off, High Temperature								
545001071100	LEDHighbay-P5 130W-840-AS-HT	HID 400W	130	20800	160	4000	60° x 100°	3.70

## Accessories



545098000600  
LEDHighbay-P4 Bracket-D420



545098003600  
LEDHighbay-P4 Reflector-D420



543098021900  
LEDFixture-IP68-Connector-Kit-3



545098003900  
LEDHighbay-Pole

## Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
545001071100	LEDHighbay-P5 130W-840-AS-HT	94051190	453x453x131	4.15	6941491721057	1
543098021900	LEDFixture-IP68-Connector-Kit-3	39174000	265x245x205	0.08	6941497708991	1
545098000600	LEDHighbay-P4 Bracket-D420	94059900	186x47x157	0.44	6956321806590	1
545098003600	LEDHighbay-P4 Reflector-D420	94059900	426x426x140	1.89	6941497726209	1
545098003900	LEDHighbay-Pole	94059900	54.9x335x40	0.47	6941497728333	1

### Technical Specifications

Lifetime (L70)	100,000 h
Lifetime (L80)	70,000 h
Lifetime (L80) HT	h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Finishing	Grey Pantone 417U
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP66
Impact strength	IK08
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	850°C
Power factor	≥ 0.9
Surge protection	4 kV

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	1 m

**5 YEARS WARRANTY**



### Mechanical Properties


Housing material	Aluminum
UV resistant	Yes
Optical material	Polycarbonate
Cover material	Polycarbonate

### Ambient Conditions


Operating temperature	
Operating temperature HT	-30-+70°C
Application temperature	+25°C
Storage environment	-30-+60°C

## Dimensional Drawing (mm)


LEDHighbay-P5  
80W & 110W

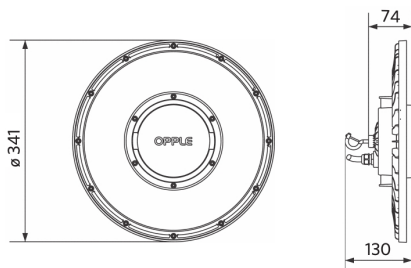


LEDHighbay-P5  
130W & 150W & 200 & 240W

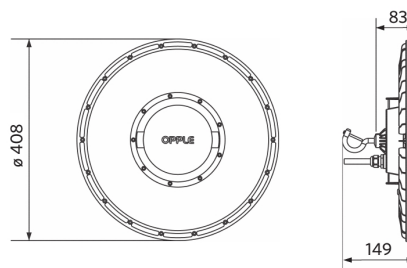


LEDHighbay-P5  
Reflector-D330

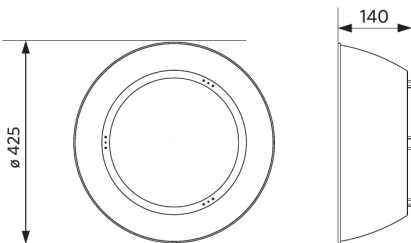


LEDHighbay-P5  
Reflector-D420

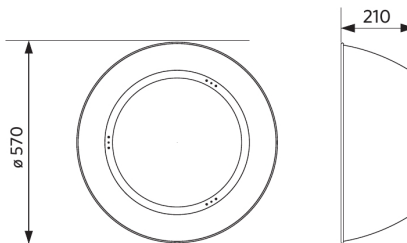

LEDHighbay-P5  
Bracket-D330

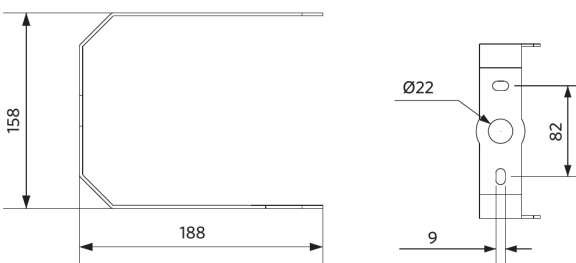

LEDHighbay-P5  
Bracket-D420

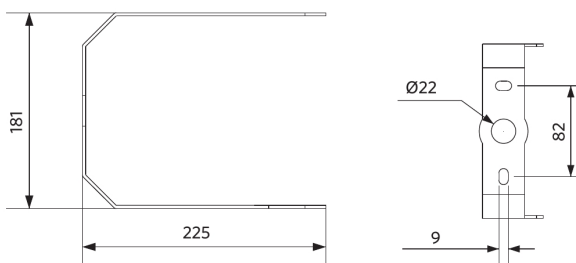

## Photometric Data

