



**Linear EcoMax**

- Easy to install LED linear solution
- Elegant but sturdy design: IP44 and IK06
- Comfortable light due to opal diffusor
- Central or side power connection
- Motion and daylight sensor accessory available



**Specifications**

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
Emergency version 1 hour, On-Off							
549003003800	LEDLinear-E CL12-40W-3000-WH-EM1	TL 2x36W	40	4320	108	3000	3.03

**Accessories**



140060553  
LED Module sensor CT

**Packaging Information**

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
549003003800	LEDLinear-E CL12-40W-3000-WH-EM1	94051190	195x85x1255	3.53	6941497737557	1
140060553	LED Module sensor CT	85365005	40x35x80	0.06	6945730491732	1
506006003100	LEDSmart-Relay-500W	85364900	37x110x57	0.10	6956321820824	1

### Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	110°
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP44
Impact strength	IK06
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

### Mechanical Properties

Housing material	Steel
Optical material	PMMA

### Ambient Conditions

Operating temperature	-10--+40°C
Application temperature	+25°C
Storage environment	-25--+50°C



OPPLE Lighting  
549003003800


A  
B  
C  
D  
E  
F  
G

40 kWh/1000h

2019/2015

## Dimensional Drawing (mm)

LEDLinear-E CL12

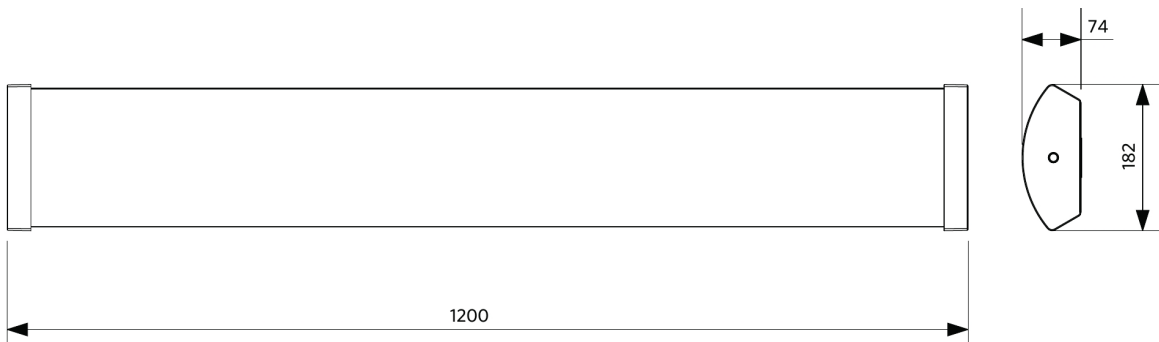

## Photometric Data

