



Linear EcoMax

- Easy to install LED linear solution
- Elegant but sturdy design: IP44 and IK06
- Comfortable light due to opal diffusor
- Central or side power connection
- Motion and daylight sensor accessory available



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
Emergency version 3 hours, On-Off							
549003004200	LEDLinear-E CL12-40W-3000-WH-EM3	TL 2x36W	40	4320	108	3000	3.03

Accessories



140060553
LED Module sensor CT

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
549003004200	LEDLinear-E CL12-40W-3000-WH-EM3	94051190	195x85x1255	3.53	6941497737519	1
140060553	LED Module sensor CT	85365005	40x35x80	0.06	6945730491732	1
506006003100	LEDsmart-Relay-500W	85364900	37x110x57	0.10	6956321820824	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	110°
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP44
Impact strength	IK06
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	No

Mechanical Properties

Housing material	Steel
Optical material	PMMA


Ambient Conditions

Operating temperature	-10~+40°C
Application temperature	+25°C
Storage environment	-25~+50°C

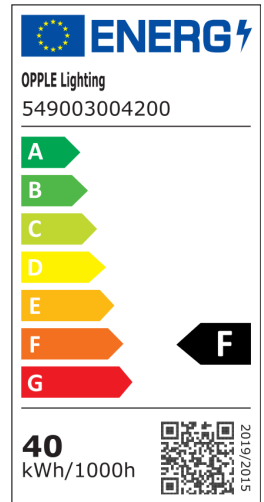

Dimensional Drawing (mm)

LEDLinear-E CL12

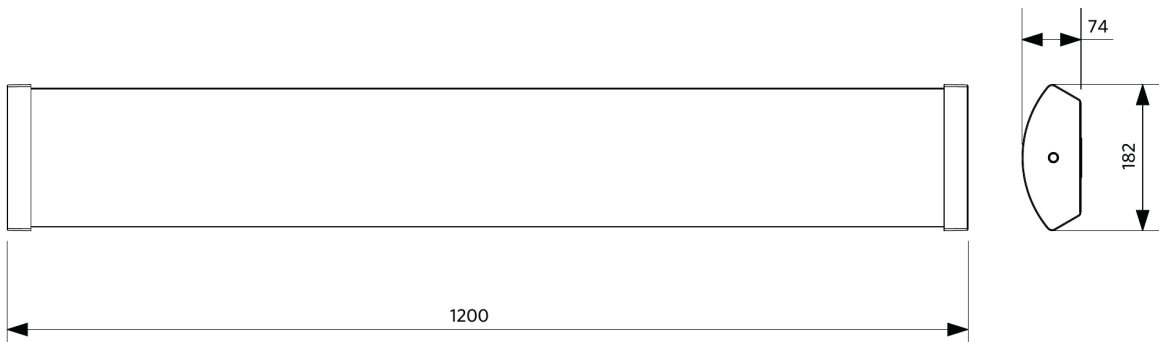

Photometric Data

